


ONE[®]
FOR ALL

Big Button


Universal Remote Control

URC6821

ENGLISH 2
FRANÇAIS 10

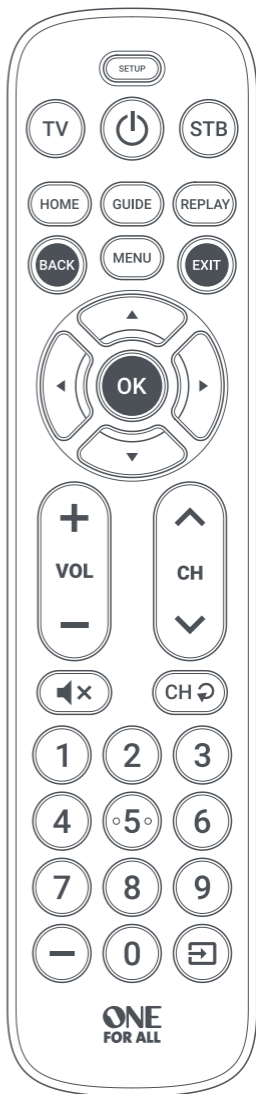

KEY DESCRIPTIONS

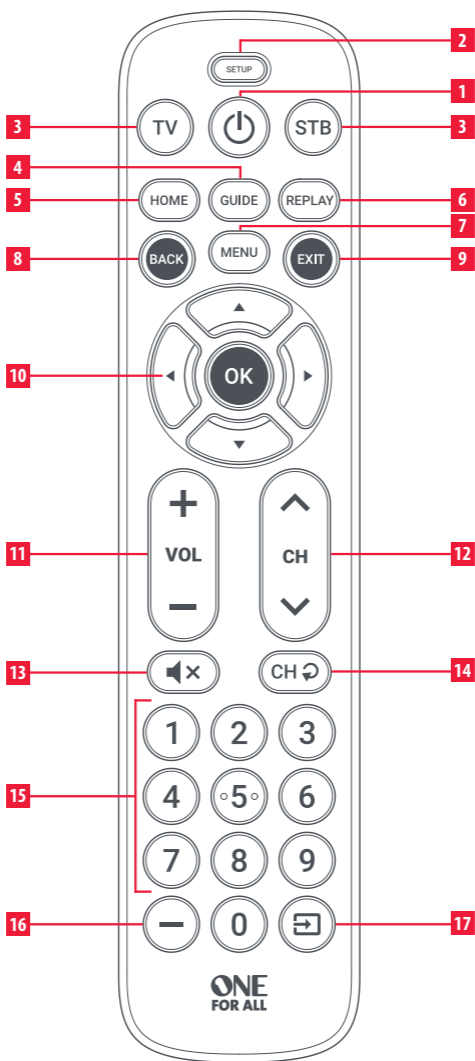

CAUTION: Risk of explosion if battery is replaced by an incorrect type. Use quality Alkaline batteries.




KEY DESCRIPTIONS

- 1 Power** Switches your devices on and off.
- 2 Setup** This key is used to set up the Big Button remote.
- 3 Device keys** These keys are used to select which device the Big Button Remote currently controls. After pressing the TV key, the remote will control your TV. To switch to controlling another device, simply press the appropriate key. The devices that can be programmed to each key are as follows:
TV: All televisions such as LED, LCD , Plasma, OLED etc.
STB: Set Top Boxes, including Satellite, Cable and Freeview. **+** Streaming devices such as an Apple TV, Roku Box, Foxtel Now etc. Also works Xbox 360 and Xbox One.
- 4 Guide** TV Guide.
- 5 Home** Displays the Home Menu.
- 6 Replay** Replay last 30 seconds.
- 7 Menu** Access the installation menu of the current device.
- 8 Back** Back one step in the Menu.
- 9 Exit** Exits the menu.
- 10 Menu Directions and OK**
Control the menu of the current device.
- 11 Volume Up and Down**
Control the volume of the current device.
- 12 Channel Up & Down**
Change channels on the current device.
- 13 Mute** Mutes the volume of the current device. You can also set up this key to always control one device. For details see the Volume Lock feature.
- 14 Last Channel** Changes to the last channel viewed.
- 15 Digits** Select channels on the current device.
- 16 Delimiter "Dash" key**
Selects sub channels such as local news and extra functions in the Menu mode of your Set Top Box.
- 17 Input** Used to select Input on devices.

SETUP

The Big Button Remote remote is pre-programmed to control some of the most popular devices out of the box. If you have one of the following devices try putting the batteries in and pressing the device key, and then press a few keys to see if the remote works your device:

Device Key To Press Device controlled

	TV	Samsung TV
	STB	Comcast


If your device is not one of those listed above, or you have extra devices to set up, there are 2 ways to do this. The easiest is SimpleSet which is used for the common brands and devices.

SIMPLESET

If the brand of your device is shown in the SimpleSet picture pointing to a key, you can use the SimpleSet system described in this section, please locate the brand of your device and note the key associated with it.


TV

- ① **Element**
- ② **Insignia**
- ③ **LG**
- ④ **Philips, Magnavox**
- ⑤ **Samsung, Panasonic, Sceptre**
- ⑥ **Sharp, Hisense**
- ⑦ **Sony, Sanyo**
- ⑧ **TCL, RCA**
- ⑨ **Toshiba, Westinghouse**
- ⑩ **VIZIO**



STB




- ① **Bell**
- ② **Comcast/Xfinity**
- ③ **Cox Communications**
- ④ **DIRECTV, AT&T, Sky Mexico**
- ⑤ **DISH Network, Dish Mexico, Izzi Telecom**
- ⑥ **Optimum, Suddenlink, Altice**
- ⑦ **Rogers**
- ⑧ **Shaw**
- ⑨ **Spectrum, Charter, Time Warner Cable**
- ⑩ **Verizon, Frontier Communications**



SETUP

SIMPLESET





To set up your device:

1. Turn on your device (not on standby) and point the Big Button remote towards it.
2.  Press the Device key you wish to set up (for example TV).
3.  Hold down the Setup key until the LED under the Device key blinks twice.
4.  Hold down the digit for your brand and device as listed in the tables above - e.g. 7 for a Sony TV.
5. The remote will send the Power key every 3 seconds.
6. As soon as your device reacts by turning off release the digit.
7. The LED will blink twice and the remote should now operate your device.

• If you find one or more keys do not work as you expect, start again at step 2 – the remote will start with the next code in the memory.

SETUP BY CODE

If the brand of your device is not listed in the SimpleSet feature, you can set up by trying codes individually. To do this firstly locate your brand in the Code List. Codes are listed by brand and device, and in order of popularity.

1. Turn on your device (not on standby) and point the Big Button remote towards it.
2.  Press the Device key you wish to set up (for example TV).
3.  Hold down the Setup key until the LED under the Device key blinks twice.
4.  Enter the first 4 digit code listed for your brand (e.g. 1840 for LG).
5. The LED will blink twice on the last digit of the code.
6.  Now aim the remote towards your device and press the Power key.
7. If the device turns off your remote is ready to use. If not, repeat steps 2-6 with the next code in the list.


SETUP







LEARNING

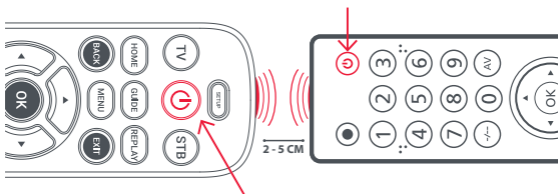Your Big Button remote control can learn any function from any other working remote control. This is a quick and easy one-time setup that allows to control any infrared controlled device you have in your living room. It also allows you to add a key or keys that may be missing to a spare key on the Big Button.

To do this, firstly make sure you have all your original remote controls to hand, and that they have working batteries in.

To learn functions, the original remote should be approximately 3cm from the Big Button remote, pointing towards it:



-  Press the Device key for the device you want to learn functions onto.
-  Hold down the Setup key until the LED under the Device key blinks twice.
-  Press 975 – the LED should blink twice.
-  Press and release the key you want to learn a function onto (for example the TV Power key) – the LED will begin to flash rapidly.
-  Press and release* the corresponding key on the original remote, for example Power.
- The LED will blink twice to indicate the key has been learned correctly.
- Repeat steps 4 and 5 for each key you want to learn – remember you can learn from multiple remotes, but only one function per key.
-  When you have learned all the functions you require, press and hold Setup key until the LED blinks twice.

* Some remotes send commands differently. If you find a function cannot be learned, try holding down the key on the original remote instead of pressing and releasing.



SETUP

Hints:

- If the LED shows one long blink at step 5, the function was not learned correctly, please try again from step 4.
- If you find one or more keys don't work properly after set up, you can re-enter the learning mode at any time by repeating the procedure from step 1.
- If one or more of your original remotes aren't working, you can still set up the Big Button remote by SimpleSet or Code Set Up.

Deleting a learned function

If you want to delete a learned function and return that keys to its original state, you can use the following procedure:

1. Press the Device key for the device you want to learn functions onto.
2.  Hold down the Setup key until the LED under the Device key blinks twice.
3.  Press 976 – the LED should blink twice
4. Press the key you want to reset twice – the LED should blink twice and the learned function has been deleted.

SETUP

SOUND BAR / AUDIO RECEIVER VOLUME CONTROL

If you have your TV connected to a Sound Bar or Audio Receiver, it's possible to set up your One For All remote to control the Volume and Mute of this device. There are two ways to do this:

AUDIO SIMPLESET

If you have a Sound Bar or Audio Device from one of the brands listed in the table below, you can use the SimpleSet method to program your remote to control it. If you do not have one of the below brands, please proceed to the next section.

Digit	Brand
1	Bose
2	Denon
3	Harman/Kardon
4	JBL, Polk Audio
5	LG
6	Onkyo
7	Samsung
8	Sonos, VIZIO
9	Sony
0	Yamaha

Note that each of the brands has a digit associated with it, for example 4 for JBL (and Polk Audio).




To set up your remote to control your Sound Bar / Audio Device, first make sure your TV and Sound Bar / Audio Device are both powered on, and that there is something playing that you can hear (this procedure will test the Mute function). Next:

- Hold down the **SETUP** and **VOLUME UP** buttons together until the LED blinks twice.
- Now point the remote towards your Sound Bar / Audio Devices and hold down the digit key for your brand (for example 4 for JBL). The remote will send the Mute function to your device every 3 seconds.
- As soon as your Sound Bar / Audio Device mutes the volume, release the digit key. The LED under the Power key will blink twice.
- Next, hold down the **SETUP** and **VOLUME DOWN** keys until the LED blinks twice. The volume up, down and Mute keys should now control your Audio Device.

SETUP


AUDIO CODE SETUP


If your Sound Bar / Audio Device is not one of the brands listed above, you can also set up the remote to control it by entering a 4 digit code. The codes are listed in the Audio Codelist section of this manual, and are listed by brand and then popularity. Locate the brand of your Sound Bar / Audio Device in this code list and then the procedure is:

-  Hold down the **SETUP** and **VOLUME DOWN** keys until the LED blinks twice.
-  Hold down the **SETUP** and **VOLUME UP** keys until the LED blinks twice.
- Enter the first 4 digit code for your Sound Bar / Audio Device. The LED should blink twice on the last digit.
-  Now try the **Volume Up, Down** and **Mute** and see if they control your Sound Bar or Audio Device.
- If they work, your remote is set up. If not try again from step 1 using the next code in the list.

RESET VOLUME CONTROL

To reset the volume control to the original setting:

-  Hold down **SETUP** and **VOLUME DOWN** keys until the LED blinks 4 times. Volume control is now reset.

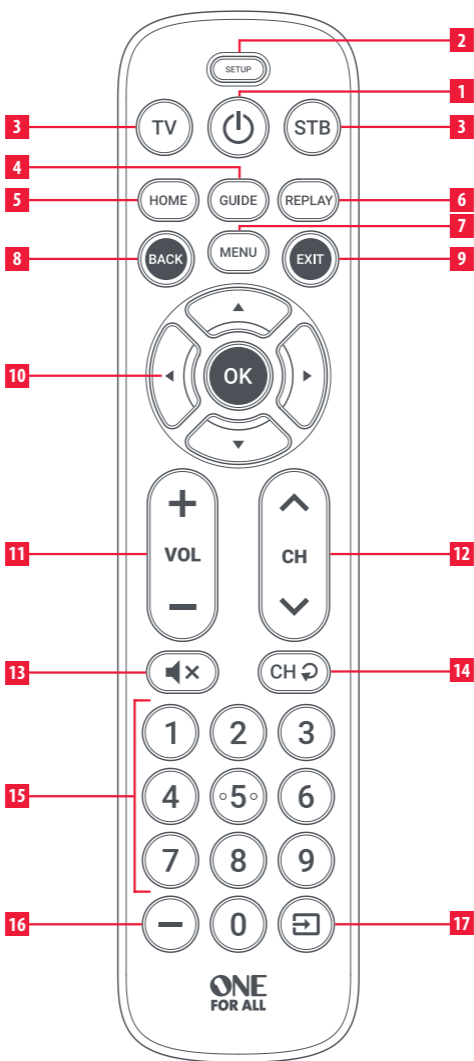

ATTENTION : il existe des risques d'explosion si les piles ne sont pas remplacées par le type approprié. Utilisez des piles alcalines de qualité.





DESCRIPTION DES BOUTONS

- 1 Alimentation** Permet d'allumer et d'éteindre vos appareils.
- 2 SETUP** Permet de configurer la télécommande Big Button Remote.
- 3 Boutons associés aux appareils** Permettent de sélectionner l'appareil contrôlé actuellement par la télécommande Big Button Remote. Par exemple, si vous appuyez sur le bouton TV, la télécommande contrôlera votre téléviseur. Pour contrôler un autre appareil, appuyez simplement sur le bouton adéquat. Les appareils suivants peuvent être associés à chacun des boutons dédiés :
TV: tous les téléviseurs (LCD, Plasma, OLED, etc.)
STB: les décodeurs, y compris de type Câble, Satellite et Freeview.
+ les appareils de streaming de type Apple TV, Roku et Foxtel Now, entre autres, et les consoles Xbox 360 et Xbox One
- 4 GUIDE** Permet d'accéder au programme TV.
- 5 HOME** Permet d'afficher le menu d'accueil.
- 6 Replay** Relecture Relit les 30 dernières secondes.
- 7 MENU** Permet d'accéder au menu d'installation de l'appareil actuellement contrôlé.
- 8 Retour** Permet de revenir à l'étape précédente dans le menu.
- 9 EXIT** Permet de quitter un menu.
- 10 Boutons fléchés et bouton OK** Permettent d'interagir avec le menu correspondant à l'appareil actuellement contrôlé.
- 11 Augmentation et diminution du volume** Permettent d'ajuster le volume de l'appareil actuellement contrôlé.
- 12 Parcours des chaînes** Permettent de parcourir les chaînes sur l'appareil actuellement contrôlé.
- 13 Mode Muet** Permet de désactiver le volume de l'appareil actuellement contrôlé. Vous pouvez également faire en sorte qu'il soit associé à un seul appareil uniquement. Pour obtenir des détails, consultez la section « Verrouillage de la fonctionnalité de contrôle du volume ».
- 14 Dernière chaîne** Permet de basculer sur la dernière chaîne visionnée.
- 15 Chiffres** Permettent de sélectionner des chaînes sur l'appareil actuellement contrôlé.
- 16 Touche de délimitation « tirect »** Sélectionne des sous-chaînes, comme les actualités locales et des fonctions supplémentaires du mode Menu du décodeur.
- 17 Entrée** Permet de sélectionner une entrée sur vos appareils.

CONFIGURATION

La télécommande Big Button Remote, préprogrammée, permet de contrôler directement certains des appareils les plus populaires. Si vous disposez de l'un des appareils suivants, insérez les piles dans la télécommande, appuyez sur le bouton correspondant à l'appareil en question, puis actionnez d'autres boutons afin de vérifier si la télécommande fonctionne avec l'appareil :

Bouton à actionner Appareil contrôlé

	TV	Téléviseur Samsung
	STB	Comcast

Si votre appareil n'est pas listé ci-dessus, ou si vous souhaitez configurer d'autres appareils, vous pouvez procéder de deux façons. L'alternative la plus simple consiste à utiliser le système SimpleSet, compatible avec les marques et appareils courants.

SYSTÈME SIMPLESET

Si la marque de votre appareil est listée ci-dessous, vous pouvez utiliser le système SimpleSet décrit dans cette section. Assurez-vous de prendre note du bouton associé à la marque de votre appareil.

TV

- ① **Element**
- ② **Insignia**
- ③ **LG**
- ④ **Philips, Magnavox**
- ⑤ **Samsung, Panasonic, Sceptre**
- ⑥ **Sharp, Hisense**
- ⑦ **Sony, Sanyo**
- ⑧ **TCL, RCA**
- ⑨ **Toshiba, Westinghouse**
- ⑩ **VIZIO**



STB




- ① **Bell**
- ② **Comcast/Xfinity**
- ③ **Cox Communications**
- ④ **DIRECTV, AT&T, Sky Mexico**
- ⑤ **DISH Network, Dish Mexico, Izzti Telecom**
- ⑥ **Optimum, Suddenlink, Altice**
- ⑦ **Rogers**
- ⑧ **Shaw**
- ⑨ **Spectrum, Charter, Time Warner Cable**
- ⑩ **Verizon, Frontier Communications**



CONFIGURATION

SYSTÈME SIMPLESET








Pour configurer votre appareil :

1. Allumez votre appareil, puis pointez la télécommande Big Button en direction de ce dernier (il ne doit pas être en veille).
2.  Appuyez sur le bouton que vous souhaitez programmer (par exemple, le bouton TV).
3.  Maintenez le bouton SETUP enfoncé jusqu'à ce que le voyant situé sous le bouton associé à l'appareil clignote deux fois.
4.  Maintenez le bouton adéquat enfoncé, conformément aux indications précédentes (par exemple, le bouton 7 s'il s'agit d'un téléviseur Sony).
5. La télécommande enverra la touche Marche/Arrêt toutes les 3 secondes.
6. Dès que votre appareil réagit en s'éteignant, relâchez le chiffre.
7. Le voyant clignote deux fois. La télécommande devrait désormais permettre de contrôler l'appareil.

• Si un ou plusieurs boutons ne fonctionnent pas comme prévu, reprenez la procédure à partir de l'étape 2. Le dernier code enregistré sera utilisé.

CONFIGURATION À L'AIDE D'UN CODE

Si la marque de votre appareil n'est pas listée dans la section « SYSTÈME SIMPLESET » ci-dessus, vous pouvez procéder à la configuration à l'aide d'un code. Pour ce faire, commencez par localiser la marque de votre appareil dans la liste des codes. Ces derniers sont répertoriés par marque, appareil et ordre de popularité.


1. Allumez votre appareil, puis pointez la télécommande Big Button en direction de ce dernier (il ne doit pas être en veille).
2.  Appuyez sur le bouton que vous souhaitez programmer (par exemple, le bouton TV).
3.  Maintenez le bouton SETUP enfoncé jusqu'à ce que le voyant situé sous le bouton associé à l'appareil clignote deux fois.
4.     Saisissez le premier code à quatre chiffres indiqué pour votre marque (par exemple, 1840 pour LG).
5. Le voyant clignote deux fois lorsque vous saisissez le dernier chiffre du code.
6.  Dirigez la télécommande vers l'appareil et appuyez sur le bouton d'alimentation.
7. Si l'appareil s'éteint, votre télécommande est prête à l'emploi. Sinon, répétez les étapes 2 à 6 avec le code suivant dans la liste.







CONFIGURATION

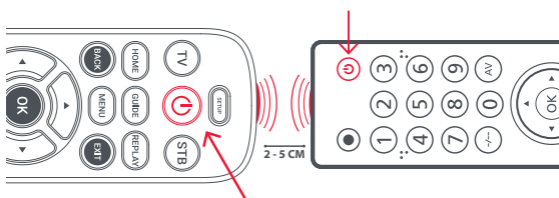FONCTION D'APPRENTISSAGE

Il est possible de copier les fonctions d'une autre télécommande sur votre télécommande Big Button. Cette opération, rapide, simple et à n'effectuer qu'une seule fois, permet de contrôler n'importe quel appareil à fonctionnement à infrarouge se trouvant dans votre salon. Grâce à cela, vous pouvez également assigner, à un bouton non utilisé, des fonctions non présentes sur la télécommande Big Button. Pour ce faire, assurez-vous au préalable de disposer de toutes les télécommandes d'origine, et que celles-ci comportent des piles chargées.

Afin que des fonctions puissent être ajoutées, une télécommande d'origine doit se trouver approximativement à trois centimètres de la télécommande Big Button et être dirigée vers celle-ci :



-  Appuyez sur le bouton associé à l'appareil pour lequel vous souhaitez ajouter des fonctions.
-  Maintenez le bouton SETUP enfoncé jusqu'à ce que le voyant situé sous le bouton associé à l'appareil clignote deux fois.
-  Appuyez sur 975. Le voyant clignote alors deux fois.
-  Appuyez brièvement sur le bouton auquel vous souhaitez associer la fonction (par exemple, le bouton d'alimentation). Le voyant clignote alors rapidement.
-  Appuyez brièvement* sur le bouton correspondant de la télécommande d'origine (ici, le bouton d'alimentation).
- Le voyant clignote deux fois afin d'indiquer que la copie a été menée à bien.
- Répétez les étapes 4 à 5 pour chacun des boutons à programmer. Vous pouvez transférer des fonctions à partir de différentes télécommandes, mais un bouton donné ne peut être associé qu'à une seule fonction.
-  Une fois toutes les fonctions de votre choix copiées, maintenez le bouton SETUP enfoncé jusqu'à ce que le voyant clignote deux fois.

CONFIGURATION



* Le fonctionnement des télécommandes peut varier d'un modèle à l'autre. Si vous ne parvenez pas à copier une fonction, essayez de maintenir le bouton de la télécommande d'origine enfoncé, plutôt que d'effectuer un appui bref.

Remarques :

- Si le voyant émet un clignotement long lors de l'étape 5, la fonction n'a pas été correctement transférée. Reprenez la procédure à partir de l'étape 4.
- Si l'un des boutons ne fonctionne pas correctement une fois la configuration terminée, vous pouvez repasser en mode d'apprentissage à tout moment en reprenant la procédure depuis l'étape 1.
- Si une ou plusieurs de vos télécommandes d'origine ne fonctionnent plus, vous pouvez programmer votre télécommande Big Button à l'aide du système SimpleSet ou d'un code.

Suppression d'une fonction copiée

Si vous souhaitez supprimer une fonction copiée et rétablir le fonctionnement d'origine d'un bouton, vous pouvez procéder comme suit :

1. Appuyez sur le bouton associé à l'appareil pour lequel vous souhaitez ajouter des fonctions.
2.  Maintenez le bouton SETUP enfoncé jusqu'à ce que le voyant situé sous le bouton associé à l'appareil clignote deux fois.
3.  Appuyez sur 976. Le voyant clignote alors deux fois.
4. Appuyez deux fois sur le bouton que vous souhaitez réinitialiser. Le voyant clignote alors deux fois et la fonction est désormais supprimée.

CONFIGURATION

CONTRÔLE DU VOLUME DE LA BARRE DE SON/DU RÉCEPTEUR AUDIO

Si votre téléviseur est connecté à une barre de son ou un récepteur audio, vous pouvez configurer votre télécommande One For All pour en contrôler le volume. Vous avez le choix entre deux méthodes :






SIMPLESET AUDIO

Si vous utilisez une barre de son ou un appareil audio de l'une des marques listées ci-dessous, vous pouvez adopter la méthode Simple-Set pour programmer votre télécommande en fonction. Si la marque est différente, passez à la section suivante.

Numéro	Marque
①	Bose
②	Denon
③	Harman/Kardon
④	JBL, Polk Audio
⑤	LG
⑥	Onkyo
⑦	Samsung
⑧	Sonos, VIZIO
⑨	Sony
⑩	Yamaha

Chaque marque est associée à un numéro. Par exemple, 4 pour JBL (et Polk Audio).



Pour configurer votre télécommande de sorte à contrôler votre barre/appareil audio, assurez-vous que vos produits sont allumés et lancez la lecture d'un fichier que vous pouvez entendre. Suivant :

-   Maintenez simultanément les touches **SETUP** et **VOLUME HAUT** enfoncées jusqu'à ce que la DEL clignote deux fois.
-  Pointez la télécommande vers la barre de son/l'appareil audio et maintenez enfoncé le numéro correspondant à la marque (par exemple, 4 pour JBL). La télécommande envoie un signal de passage au mode Muet toutes les 3 secondes.
- Dès que votre appareil passe en mode Muet, relâchez le numéro. Le voyant situé sous le bouton d'alimentation clignote deux fois.
-   Ensuite, maintenez les touches **SETUP** et **VOLUME BAS** enfoncées jusqu'à ce que la DEL clignote deux fois. Les touches d'augmentation, de diminution du volume et de sourdine doivent maintenant contrôler votre périphérique audio

CONFIGURATION



CONFIGURATION DU CODE

Si la marque de votre barre de son/appareil audio n'est pas listée ci-dessus, vous pouvez également configurer la télécommande de sorte à la contrôler à l'aide d'un code à 4 chiffres. Les codes sont répertoriés dans la section Liste de codes audio de ce manuel, triés par marque puis par popularité. Recherchez la marque de votre appareil dans la liste, puis procédez comme suit :

-   Maintenez les touches **SETUP** et **VOLUME BAS** enfoncées jusqu'à ce que la DEL clignote deux fois.
-   Maintenez les boutons **AUGMENTER LE VOLUME** et **RÉDUIRE LE VOLUME** enfoncées jusqu'à ce que la DEL clignote deux fois.
- Saisissez le premier code à 4 chiffres pour votre barre de son/ appareil audio. Le voyant doit clignoter deux fois lorsque vous saisissez le dernier chiffre.
-  Essayez d'utiliser les boutons **Augmenter le volume, Réduire le volume** et **Muet** pour voir s'ils permettent de contrôler la barre/l'appareil.
- S'ils fonctionnent, la télécommande est configurée. Si ce n'est pas le cas, essayez à nouveau en utilisant le code suivant dans la liste.

RÉINITIALISER LE CONTRÔLE DU VOLUME

Pour réinitialiser le contrôle du volume au réglage d'origine,

- 
- 
- maintenez les touches
- SETUP**
- et
- VOLUME BAS**
- enfoncées jusqu'à ce que la DEL clignote 4 fois. Le contrôle du volume est maintenant réinitialisé.

CODE LIST | TV

TV	
Acer	4143
Admiral	3879
Affinity	3717, 3870, 3577, 3716
Aiwa	1362
Akai	1675
Akura	1687
AOC	3720, 2691, 1365, 2014, 2087
Apex Digital	2397, 4347, 4350
Ario	2397
Asus	3340
Asustek	3340
Atvio	3638, 3636, 3879
Atyme	2746
Audiosonic	1675
Audiovox	1564, 1276, 1769, 2121
Auria	4748, 2087, 2014, 2277
Avera	2397, 2049
Avol	2735, 4367, 3382, 3118, 1709
Axen	1709
Axess	3593
BenQ	1756
Blu:sens	2735
Bolva	2397
Broksonic	1892
Calypso	4748
Champion	1362
Changhong	4629
Coby	3627
Commercial Solutions	1447
Conia	1687
Contex	4053, 4280
Craig	3423
Crosley	3115
Curtis	3577, 2855, 2466, 3895, 2352, 2397, 3939, 4035, 3636, 3382, 3717
Curtis Mathes	1661
Daewoo	1661, 3115, 3879
Digitrex	4207
Disney	1892
DNS	3879
Durabrand	1463, 1595, 3879
Dynex	2049, 2184, 1780, 1463
Electrograph	1755
Electrohome	1670
Electron	2466, 2855
Element	3559, 1687, 2183, 2964, 4635, 5173, 4910, 4398, 1886, 4217, 4740
Elite	1457
Emerson	1864, 1963, 1394, 1886, 1595, 3623, 1661, 2183, 3559
Envision	1365, 2087, 2014
Epworth	1362
EQD	2014, 2087, 2277
EQD Auria	2014, 2087, 2277
ESA	1595, 1963
eTec	2397
Exorvision	3953
Favi	3382
Fisher	1362
Fluid	2964
Fujimaro	1687
Funai	1595, 1864, 1394, 1963
Furrion	3332, 4093
Gateway	1755, 1756
GE	1447
General Electric	1447
GFM	1886, 1963, 1864
GPX	3980, 3977
Haier	2309, 1749, 1748, 3382, 1753, 3429, 2293, 4398, 2214
Hannspree	1348, 2786
Hisense	3519, 4740, 4618, 2183, 5185, 1660, 3382, 4398
Hitachi	1643, 4398, 5102, 4455, 3382, 0679
Hiteker	3118
HKPro	3879, 2434
Hyundai	4618
iLo	1463, 1394
Insignia	2049, 1780, 4487, 3227, 1564, 1641, 2184, 1892, 1423, 1660, 1963, 1463 3382, 3429, 3118, 3094
iSymphony	1774, 1601, 3393, 2321, 2271, 4107, 4398, 5182, 4105, 4053, 1670, 1892, 4280, 4367
JVC	4182
KC	1687
KDS	4007
LeEco	2397, 2352, 1749, 2309
Legend	3638
Lexus	1840, 2731, 1423, 1860, 2358, 4397, 3401, 4398, 0017
LG	3183
Liberton	3382
Lloyd's	0017
LXI	1687
MAG	3623, 1866, 2372, 1454, 1455, 1963, 1365, 1755, 1867, 4740, 1394, 4398
Magnavox	1454
Marantz	1755
Maxent	4686, 1892, 1670, 1687
Memorex	1250, 1797
Mitsubishi	1250, 1797
Mitsubishi Electric	1123, 3638, 3673
Mitsui	1687
Mx Onda	3879
Mystery	4093, 2104, 2735, 3382, 3423
Naxa	3257, 1797, 3000, 2293
NEC	1755
NetTV	1564, 3519, 2183
Nexus	2183
Nexus Electronics	0017
Nikko	2104
Nimbro	1365
Norcent	2158, 1657, 4347
NuVision	3899, 4139
oCOSMO	1610
Ölevia	4398, 1709, 3024, 3078, 5118
Onn	

TV | STREAM

Optimus	0679	SunBriteTV	2528, 1610
Orion	1463, 1892, 3540	Sungpo	2360, 3519, 3394, 4618, 4740, 1659, 4507, 4398
Otic	1687	Supersonic	3593, 2104, 1753
Panasonic	1291, 1480	SVA	1963
PARK	2104	Sylvania	1864, 1963, 1886, 1394, 1595, 3332, 4053
Philco	1963, 1394	Symphonic	1595, 1963, 1394
Philips	1867, 1455, 2372, 1454, 3069, 3623, 1866, 3396, 1744, 0017, 2800, 4398, 1755, 1963, 1365, 1394, 4740	Syntax	1610
Philips Magnavox	3396, 1866, 3623	Tatung	1756
Pioneer	0679, 1260, 1457	TCL	4398, 2434, 3183, 3879
Planar	0679	Technics	0017
Polaroid	1523, 1769, 4035, 1687, 1276, 1767, 3942, 2121, 3382, 2434, 3118	TNCi	0017
Portland	1661	Toshiba	2724, 3945, 4885
Prima	1753, 1749	U-max	4629
Proscan	1447, 3577, 3382, 2183, 3717, 3332, 3636, 4494, 3895, 3953, 4495, 4035, 4053, 4491, 3939, 4483, 4375, 4500, 2746, 3429, 4093	Upstar	4182, 4405, 3899
Proview	1687	Vidao	2397
Pulsar	0017	Viewsonic	2014, 3706, 2087, 2277, 1755, 2049, 1564, 1365
Pyle	2196	Viore	3382, 2352, 3118, 2104, 3429, 3094
Pyle Home	2196	VisionQuest	1687
QFX	3593	VIZIO	1758, 3758, 4905, 2707, 4723, 2757, 1756, 3415, 2512
QuantumFX	3593	W Box	4686
Quasar	1291, 4207, 3899, 4367, 3382	W Box Technologies	4686
RCA	1447, 2434, 2247, 2746, 4214, 3577, 1781, 3382, 4740, 3332, 3717, 2932, 3895, 2187, 2183, 4494, 3636, 3939, 4488, 3953, 4053, 2855, 4491, 4627, 0679, 4035, 4483, 4495, 4623, 4625, 1661, 3519, 4629, 3938, 4093, 1670	Wards	0017
Roku	4398	Westinghouse	1712, 4797, 3382, 4910, 5173, 2293, 3559, 2397, 3908, 4635
Runco	0017	White Westinghouse	1661
Sampo	1755	Wyse	1365
Samsung	2051, 1632	Xiahua	1753, 1749
Sansui	1892, 3540, 1670, 1463, 4053, 3564, 4280, 3559	Xoceco	1753, 1749
Sanyo	1142, 1362, 4168, 4740, 4667, 3488, 2049, 1480, 1564	Zenith	0017, 1423, 1661, 2731, 1365, 2358, 3401, 1463
Sceptre	3899, 2528, 4886, 4139		
Seiki	3953, 4635, 2964, 3559, 3560, 4794, 3382, 4217		
Sens	1749		
Seura	4751		
Sharp	2360, 3519, 3394, 4618, 4740, 1659, 4507, 4398		
Sigmac	3477, 3423		
Silo	3899, 3477, 4182		
Silo Digital	3899, 3477, 4182		
SkyVue	4135, 2360		
Solé	4549		
Sony	0810, 4448, 4189		
Spectroniq	1687		
Speler	4105, 4041, 2434		

STREAM

ABS	1272
AirTV	5295
Alienware	1272
Amlogic	4899
Apple	2615
Armada	4899
Beelink	5123
Boxee	3693
Ceton	1272
Cloud Media	2260
CyberPower	1272
Dell	1272
DishTV	5295
D-Link	3671, 3693
Echostar	5295
Funai	3339
Gateway	1272
G-Box Midnight	4440
Geniatech	4339
Hewlett Packard	1272
Howard Computers	1272
HP	1272
Hush	1272
iBUYPOWER	1272
lomega	2558
Kollins	4339

STREAM | STB

LG	3373
Linksys	1272
Logitech	3272
Magnavox	3339
Matricom	4440, 4899
Media Center PC	1272
Mi	3982
Micca	3850
Microsoft	4000, 1272, 2049
Millet	3982
Mind	1272
Minix	4413, 3884
MyGica	4339
Netgear	3324, 2036, 4401, 3292
NiveusMedia	1272
Northgate	1272
NVIDIA	4918
Ortek	3122
Panasonic	3760
PDP	5724
Pivos	4339
Popcorn Hour	2260
R-Box	5540
RCA	3335
Ricavision	1272
Roku	3061
Seagate	2698
Sling Media	5295, 3778
Sony	5724, 2713, 1272
Stack 9	1272
Systemax	1272
Tagar Systems	1272
Technicolor	5295
Tibo	4339
Toshiba	1272
Touch	1272
Vensmile	4899
Viewsonic	1272
VIZIO	3670
Voodoo	1272
Western Digital	2558
Xbox	4000, 2049, 1272
Xiaomi	3982
ZT Group	1272

STB

3 Rivers Telephone Cooperative	1376, 4437
702 Communications	0775
Accelplus	1376, 1877, 1982
Access Cable Television	1376, 1877, 1982
Access Communications	1376, 2187, 4537
Access Montana	1998, 2254, 3028, 3426, 3605
Ace Communications	2254
Acira	3605, 1376, 1877, 1982
ACME Communications	2254
ACTV Cablevision	1376, 1877, 1982
Adak Cablevision	1376, 1877, 1982
Adams Cable TV	1376, 4079
AdamsWells	4437
ADB	2586, 2254, 1481, 1998, 2302, 3028
Advanced Broadband	1376, 1877, 1982

Advanced Cable Communications	4079
Advanced Telemedia	1376, 1877, 1982
Advocate Communications	1376, 1982
AEBC	1998, 2254, 3028, 3426, 3605
Airwave Networks	1376, 1877, 1982
Alabama Broadband	1376
Algona Municipal Utilities	1376, 1877, 1982
All West Communications	1376
Alleghany Cablevision	1376, 1877, 1982
Allegiance Communications	1376
Alliance Communications	1376
Allied Telesis	1376, 1877, 1982
Allo Communications	1481, 1998, 2302, 2482, 3028
Alma Municipal Cable	1376, 1877, 1982
Almega Cable	1376, 1877, 1982
Alpine Cable	1376, 1877, 1982
Alsea River Cable	1376, 1877, 1982
Alta Utilities	1877
Altatec	1877
Alternative Cable	1376, 1877, 1982
Altice USA	1376, 1877, 3885, 3560, 1982
Altitude Communications	1376
American Broadband	1376, 1877, 1982
American Broadband Missouri	1376, 1877, 1982
American Entertainment Network	1376, 1877, 1982
American Telecasting	1376, 1877, 1982
American Warrior Networks	1376, 1877, 1982
Amherst Telephone	1376, 1877, 1982
Amino	1615, 1481, 1898, 3605, 2482, 2302, 1998, 3028, 3426, 4437
Andrew Telephone	1998, 2254, 3028, 3426, 3605
Anne Arundel Broadband	1376, 3560
Antenne TV de St-Zacharie	1376
Antietam Cable	1376, 1877, 1982
Arc One	1376, 1877, 1982
Arctic Cooperatives	1376, 1877, 1982
Argent Communications	1376, 1877, 1982
Arialink Broadband	1376, 1877, 1982
Arkwest	1481, 2482, 1998, 2302, 3028
Arledge Electronics	1376, 0775
Arlington TV Cooperative	1376, 1877, 1982
Armstrong	1376, 3560
Arris	1376, 2378, 1982, 1998, 2187, 5912, 0869, 1877, 5097, 0858, 5537, 5942
Arthur Mutual Telephone	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Arvig Communication Systems	1376, 1982, 1998, 2345
Ashland Home Net	1376, 1877, 1982
Askivision Systems	1376, 1877, 1982
Astrea	1376, 1877, 1982
AT&T	1377, 0858
AT&T U-verse	0858
ATC Communications	1376, 1951, 3560

STB

ATI Networks	1376, 1877, 1982	BGTCO	1898, 3605
Atlantic Broadband	1376, 1877, 1982, 3560, 4079	Big Sandy Broadband	1376, 1877, 1982
ATMC	1376, 1982, 3028, 1998	Biltmore Communications	1376, 1877, 1982
Atwood Cable	1376, 1877, 1982	Blakely Cable Television	1376, 1877, 1982
Aurora by Hickory Telephone	1998, 2254, 3028, 3426, 3605	Bledsoe Telephone Cooperative	1481, 1998, 2254, 2302, 2482, 3028
Aurora Cable TV	1376, 1877, 1982	Block Communications	1376
Axtel	4458	Bloom Broadband	0775
Ayersville Communications	1998, 2254, 3028, 3426, 3605	Bloomington Communications	1481, 1998, 2302, 2482, 3028
Ayrshire Communications	1376, 1877, 1982	Blue Mountain TV Cable	1376, 1877, 1982
B & C Cablevision	1376, 1877, 1982	Blue Ridge Communications	1877, 3560
B & L Technologies	1376, 1877, 1982	Blue Sky Cable	1376, 1877, 1982
Bagley Cable TV	1376, 1877, 1982	Blue Stream	1376, 3560
Bailey Cable TV	1376, 1877, 1982	Blue Valley Telecommunications	1898, 3605
Baldwin County Internet	1376, 1877, 1982	BlueBridge Media	1376, 1982
Baldwin Lightstream	1877, 3560	Bluewave Communications	3426
Baldwin Telecom	1877, 3560	Bobcaygeon Cable	1376, 1877, 1982
Ballard Rural Telephone Cooperative	0775, 2302, 2586	BOLT Fiber Optic Services	1998, 2254, 3028, 3426, 3605
Barbourville Utility Commission	1376, 1877, 1982	Booher Brothers Cable	1376, 1877, 1982
Bardstown Cable	1376, 1877, 1982	Bowen Cablevision	1376, 1877, 1982
Bascom Communications	1376, 1877, 1982	Bowling Cable TV	1376, 1982
Base Cablevision	1376, 1877, 1982	Boycom Cablevision	1376
Bay Cablevision	1376, 1877, 1982	Branch Cable	1376, 1877, 1982
Bay City Cablevision	1376, 1877, 1982	Brandenburg Telecom	1481, 1998, 2302, 2482, 3028
Bay Country Communications	1376, 1877, 1982	Brandywine Cablevision	1376, 1877, 1982
Bay Creek Communications	1376	Brantley Telephone Company	1898
Bayland Communications	2586	Bresnan	1376, 1877
Bayou Cable	1376, 1877, 1982	Briand et Moreau Cable	1376, 1877, 1982
Beamspeed	1376, 1877, 1982	Bridger Cable TV	1376, 1877, 1982
Beaver Creek Telephone	1877, 1982	Bright Green Communications	1376, 1877, 1982
Beaver Valley Cable	1951, 1376, 1877, 1982	Bright House	1877, 1376, 3294, 4537
Beck's Cable Systems	1376, 1877, 1982	Bright House Networks	1877, 1376, 3294, 4537
Bee Line Cable	1376	Bristol Tennessee Essential Services	1877, 1998, 2378
Beehive Broadband	1376, 1481, 1982, 1998, 2302, 2482, 3028	Bristol Virginia Utilities	1376, 1877, 1982
BEK Communications	2254, 2302	British-American Cable	1376, 1877, 1982
BELD Broadband	1376, 1877, 1982	Broadstar Communications	1376, 1877, 1982
Belhaven Cable TV	1376, 1877, 1982	Broadstripe	1376, 3560
Bell	0775, 1998, 5537, 1877, 5097	Brockway Television	1376, 1877, 1982
Bell Aliant	1998	Broken Bow Cable TV	1376, 1877, 1982
Bell Fibe TV	1998, 5097, 5537	Brooke Telecom	3426, 1898, 3605
Bell MTS	1998, 5097, 5537, 1951	Brooks Bay Cable	1376, 1877, 1982
Bell Satellite TV	0775	Brownwood TV Cable Service	1376, 1877, 1982
Bellaire Cable	1376, 1877, 1982	Bruce Telecom	3426
Bellevue Cable	1376, 1877, 1982	Bryan Municipal Utilities	1376, 1877, 1982
Belzoni Cable	1376, 1877, 1982	BTC Broadband	2254, 2586
Ben Lomand TV	2254, 2302	Buckeye Broadband	1376, 1877, 2187, 4079
Bend Broadband	1376, 2187, 4079	Buckeye Cable System	1376, 1877, 2187, 4079
Bentleyville Cable	1376, 1877, 1982	Buckland Telephone Company Communications	1998, 2254, 3028, 3426, 3605
Benton Cooperative Telephone	1376, 1877, 1982	Buford Media Group	1376, 1982
Benton County Cable	1376, 1877, 1982	Bulldog Cable	1376, 1877, 1982
Beresford Cablevision	1376, 1877, 1982	Bulloch Telephone Cooperative	1376, 1877, 1982
Berkshire Cable Corp	1376, 1877, 1982	Burge Broadcasting System	1376, 1877
Bernard Telephone & Communications	2254	Burke's Garden Telephone Company	1898, 3605
Beulah Cable TV	1376, 1877, 1982	Burlington Telecom	1481, 1615
Bevcomm	1951, 1898, 1615	Butler Bremer Mutual Telephone	1898
Beyond Communications	1376, 1877, 1982		

BVU Optinet	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Catalina Cable	1376, 1877, 1982
BWTelecom	1376, 1982	Catawba Services	1376, 1877, 1982
Byron Cable TV	1376, 1877, 1982	CATC	1376, 1877, 1982
C & W Cable	1376, 1877, 1982	CBN	1376, 1877, 1982
C Spire	3605	CBPU Cable	1376, 1877, 1982
C.L. Davis Cable Services	1376, 1877, 1982	CC Communications	1998, 2254, 3028, 3426, 3605
Cable & Communications	1376	CCAP	1877
Cable America	1376	CDE Lightband	1998, 0858, 1615, 2254, 2586
Cable Amos	1376	Cedar Falls Utilities	1376, 1951
Cable Axion Digital	1376	Celect Communications	1376, 1877, 1982
Cable Cable	1877	Cellcom	1376, 1481, 1982, 1998, 2302, 2482, 3028
Cable Communications of Willsboro	1376, 1877, 1982	Cencom	1376, 1877, 1982
Cable Cooperative	1376, 1877, 1982	CentraCom Interactive	1376, 1877, 1982
Cable Development Corporation	1376, 1877, 1982	Central Arkansas Telephone Cooperation	3605
Cable Management Association	1376, 1877, 1982	Central Arkansas Telephone Cooperative	1376, 1877, 1982
Cable Montana	1376, 1877, 1982	Central Scott Telephone	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Cable Nebraska	1376, 1877, 1982	Central Texas Communications	1376, 1877, 1982
Cable Of The Carolinas	1376, 1877, 1982	Central TV & Internet	1376, 1877, 1982
Cable One	1376, 3560, 1877	Central Valley Cable	1376, 1877, 1982
Cable Plus	1376, 1877, 1982	Centre TV Cable	1376, 1877, 1982
Cable Suite	1376	Centrovision	1376, 1877, 1982
Cable Systems of Nevada	3605	Century Communications	1376, 1877, 1982
Cable Tech Cable TV	1376, 1877, 1982	Century Telephone	1376, 1877, 1982
Cable TV of Camrose	1376	CenturyLink	1998, 0858
Cable TV of East Alabama	1376, 1877, 1982	CenturyTel TeleVideo	1376, 1877, 1982
Cable TV of Slave Lake	1376, 1877, 1982	Chambers Cable	1376
Cable TV of St. Paul	1376, 1877, 1982	Champion Broadband	1376, 1877, 1982
Cablecom Mexico	1376	Channel Master	3118
Cablemás	1376, 1877	Chaparral Cablevision	1376, 1877, 1982
Cablenet	1376, 1877, 1982	Chariton Valley Communications	1376, 1877, 1982
CableSouth Media	1376, 1877, 1982	Charter	1877, 1376, 2187, 3560, 3294, 4537
Cableview Communications	1376, 1877, 1982	Charter Spectrum	1877, 1376, 2187, 3560, 3294, 4537
Cablevision	3885, 1376	Chatmoss Cablevision	1376, 1877, 1982
Cablevision du Nord	1376	Chequamegon Telephone Cooperative	1898, 1615, 2254, 2302
Cablevision of Marion County	1376	Cherokee Broadband	1376, 1877, 1982
Cablevision T.R.P.	1376, 1877, 1982	Chesnee Communications	1376, 1877, 1982
Cablevision Victoria	1376, 4375, 4537	Chester Telephone	1376
Cablevisión Mexico	1376, 4375, 4537	Chickamauga Telephone Corporation	1998, 2254, 3028, 3426, 3605
CalNeva Broadband	1376, 1877, 1982	Chinook Progressive Club TV	1376, 1877, 1982
CalTel Connections	2254, 2586	Chippewa Valley Cable	1376, 1877, 1982
Camellia Communications	1376, 1877, 1982	Choice Cable TV	1376, 1877, 1982
Cameron Communications	1376, 1877, 1982	Choice Communications	1376, 1877, 1982
CAMS Cable	1376, 1877, 1982	Choice Television	1376, 1877, 1982
Canaan Cable	1376, 1877, 1982	Christy Cablevision	1376, 1877, 1982
Canadian Valley Telephone	1998, 2254, 3028, 3426, 3605	CimTel	1376, 1951
Canby Telcom	1481, 2302	Cincinnati Bell	1376, 1877
Cannon Valley Cablevision	1481, 1998, 2302, 2482, 3028	CIPI Cable	1376
Caprock TV	1376, 1877, 1982	Circle Bar Cable Television	1376, 1877, 1982
Cardinal Cable Stanford	1376, 1877, 1982		
Carnegie Cable	1376, 1877, 1982		
Carolina Mountain Cable	1376, 1877, 1982		
Carr Communications	1376, 1877, 1982		
Carrell Communications	1376, 1877, 1982		
CAS Cable	1376		
Cascade Communications	1376, 1877, 1982		
Cascade Networks	1998, 2254, 3028, 3426, 3605		
Casey Cable	1376, 1877, 1982		
Caspian Community TV	1376, 1877, 1982		
Cass Cable	1376		
Castle Cable Service	1376, 1877, 1982		

Cisco	1877, 1982, 2947, 0858, 3028, 2345, 2378, 5912, 1998, 4315, 3294, 4374, 5484, 2826, 4450, 4514, 5942	Comcast	1982, 1376, 1877, 3560, 2187, 4079, 4443, 4537
Citizens Cable	1376, 1481, 2254, 2482	CommStream	1998, 2254, 3028, 3426, 3605
Citizens Cable TV	1376	Communication 1 Cablevision	2302
Citizens Cablevision	1481, 2482	Communication Services	1376, 1877, 1982
Citizens Fiber	1376, 1877, 1982	Communication Stratford	1376
Citizens Mutual Telephone	1376, 1877, 1982	Communicomm	1376, 1877, 1982
Citizens Telecom	1376, 1877, 1982	Community Antenna Service	1376, 1877, 1982
Citizens Telephone	2254, 2586	Community Antenna System	1376, 1877, 1982
City Cablevision	1376, 1877, 1982	Community Cable & Broadband	1376
City of Barnesville Cable	1376, 1877, 1982	Community Cable Service	1376, 1877, 1982
City of Baxter Springs Cable	1376, 1877, 1982	Community Communications	1376, 1877, 1982
City of Bellevue Cable	1376, 1877, 1982	Community Fiber Solutions	1998, 2254, 3028, 3426, 3605
City of Cawker City Cable	0775	Community Telecom	1376, 1877, 1982
City of Fort Yukon Cable	1376, 1877, 1982	Community Telecom Services	1376, 1877, 1982
City of Hawarden Cable	1376, 1877, 1982	Community Television	1376, 1877
City of Norway Cable	1376, 1877, 1982	CommZoom	1376, 1877, 1982
City of Quitman Cable	1376, 1877, 1982	Compagnie de Téléphone de Saint-Victor	3605
City Of Salisaw	1376	Compas Cable	1376, 1877, 1982
City of Sumas TV Cable System	1376, 1877, 1982	Complete Communication Services	1376, 1877, 1982
City West	1376	Comporium	1877, 3560, 2187
Clarence Telephone	1376, 1877, 1982	Compton Communications	1376
Clear Creek Communications	1376	Comserv	1376, 1877, 1982
ClearChoice Communications	1376, 1982	ComSouth	1376, 1877, 1982
Clearview Cable	1376, 1877, 1982	ComSpan Communications	1481, 1898
Clearview Partners	1376, 1877, 1982	Comstar Cable TV	1376, 1877, 1982
Clearview TV Cable	1376, 1877, 1982	Concept Communications Corporation	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Clearvision Cable TV	1376, 1877, 1982	Consolidated Cable	1376, 1877, 1982
Click Network	1376, 1982	Consolidated Communications	1877, 1998, 2187, 1376, 3426, 3605, 0858, 1481, 1898, 1951, 2254, 2302, 2482, 2586
ClickOne	1376, 1877, 1982	Consolidated Telecom	1376
Clinton Cable	1376, 1877, 1982	Consolidated Telecommunications Company	1376, 1998, 3028
CLT Communications	1376, 1877, 1982	Continuum	1376, 1877, 1982, 2187
CLTel	1376, 1877, 1982	Conuma Cable Systems	1376, 1877, 1982
CMA Communications	1376	Conway Corporation Cable TV	1376, 1877, 1982, 2187
CML Telephone Cooperative	1376, 1877, 1982	Conxxus	1376, 1877, 1982
CNS Television	1376, 1877, 1982	Coon Creek Telephone	1376, 1951, 2254, 3118
Co-Mo Connect	3426	Coon Rapids Municipal Utilities	1376, 1877, 1982
Coast Cable Communications	1376, 2187	Coon Valley Telephone	2254, 3118
Coast Cablevision	1376, 1877, 1982	Coop Câblo Leeds	1376, 1877
Coast Communications	1376	Coop Câblodistribution de L'Isle-aux-Coudres	1376
Coastal Link	1376	Coop de Câblodistribution Sainte-Agathe	1376
Coaxial Cable TV	1376, 1877, 1982	Coop de Câblodistribution Ste-Catherine-Fossambault	1376
Cobalt TV	1898	Cooperative Television Godahl	1376, 1877, 1982
Cobridge	1376	Coopérative Câblodistribution Notre-Dame-des-Monts	1376
Cobridge Communications	1376	Coosa Cable	1376
Cochrane Co-op Telephone	1998, 2254, 3028, 3426, 3605	Copper Mountain Metropolitan	1376, 1877, 1982
CochraneTel	3426, 4437		
Cogeco	1376, 1982, 3560, 4537		
Colane Cable TV	1376, 1877, 1982		
Coldwater Board of Public Utilities	1376, 1877, 1982		
Golfax Highline Cable	1376, 1877, 1982		
Collinsville Cable	1376, 1877, 1982		
Colonial Cablevision	1376, 1877, 1982		
ColtonTel	1376, 2378		
Columbia Power and Water	1376, 1877		
Columbus Telephone	1376		
Com-Link	1376, 1877, 1982		

STB

Corn Belt Telephone	1376, 1982	Diffusion Vermont	1376
Country Cable	1376, 1877, 1982	Digeo	2187
Country Cable TV	1376, 1877, 1982	Diode Communications	1376, 1877, 1982
Country Cablevision	1376	DirectLink	3605, 1481, 2302
Country Cablevision Ltd.	1376	DIRECTV	1377, 3724, 6268
Country Vision Cable	0775, 0869	DISH	0775
Cowley Telecable	1376, 1877, 1982	DISH Network	0775
Cox	1376, 1982, 1877, 4315, 3774, 3560	Dishpro	0775
Cox Communications	1376, 1982, 1877, 4315, 3774, 3560	Diverse Communications	1898, 1982
CP-Tel	1615, 1898, 2254	Dixie Cable TV	1376, 1877, 1982
CPWS	1376, 1877	Dixon Telephone	1376, 1877, 1982
Craig Cable TV	1376, 1877, 1982	DMS Cable	1376, 1877, 1982
Craw-Kan Telephone Cooperative	2254, 2586	Docomo Pacific	3560
Crestview Cable	1376, 1877, 1982	Downsville Community Antenna	1376, 1877, 1982
Cross Country TV	1376, 1877, 1982	Doylestown Cable TV	1376, 1877, 1982
Cross Telephone	1998, 2254, 3028, 3426, 3605	Drummond Cable TV	1376, 1877, 1982
Crosslake Communications	1376, 1877, 1982	DTC	1376, 1877, 1982
Crossman Cable	1376, 1982	Dumont Telephone	1376, 1877, 1982
Crow Cable TV	1376, 1877, 1982	Duncan Cable TV	1376, 1877, 1982
CRRS-TV	1376	Dunkerton Communications	1998, 2254, 3028, 3426, 3605
CRST Telephone Authority	1481, 1998, 2254, 2302, 2482, 3028	Duo County Telecom	2254
Crystal Broadband Networks	1376, 1877, 1982	E+ Broadband	1376, 1877, 1982
Crystal Cable TV	1376, 1877, 1982	E.Com	1376, 1877, 1982
CSI Cable	1376, 1877, 1982	Eagle Broadband	1481, 1998, 2254, 2302, 2482, 3028
CT & R Cable	1376, 1877, 1982	Eagle Cablevision	1376, 1877, 1982
CTC	1376, 1998, 3028	Eagle Communications	1376, 2187
CTV Beam	1376, 1877, 1982	Eagle Valley Telephone	1481, 1998, 2302, 2482, 3028
CumbyTel	1998, 2254, 3028, 3426, 3605	EagleVision Wireless TV Services	1376, 1877, 1982
Cunningham Telephone & Cable	1376, 1951, 2187	East Arkansas Video	1376
Curtis Cable TV	1376, 1877, 1982	East Cleveland Cable	1376, 1877, 1982
Custer Telephone Cooperative	1376, 1877, 1982	East Texas Cable	1376, 1877, 1982
CUTV	1376, 1877, 1982	Eastern Cable	1376, 1877, 1982
CWA Cable	1376, 1877, 1982	EastLink	1376, 2187
Cable F.B.	1376, 1877	EasyTEL	1481, 1998, 2302, 2482, 3028
Cabledistribution Ste-Hedwidge	1376, 1877	EATEL	1877, 3028
Cablevision Warwick	1877, 2947	Echostar	0775
D & D Cable Systems	1376, 1877, 1982	ElbertonNet	1376, 1877, 1982
D & P Communications	1376, 1951	Electron Enterprises	1376, 1877, 1982
Dairyland Cable Systems	1376, 1877, 1982	Elk River Cable TV	1376, 1877, 1982
Dais Digital Cable	1376, 1877, 1982	Elkhart TV Cable	1376, 1877, 1982
Dakota Central Telecommunications	2345	Ellsworth Cooperative Telephone Association	3605
Dalton Cable Television	1877, 1982	Emery Telecom Video	1376, 1877, 1982
Dalton Utilities	1877, 1982	Emily Coop Telephone	1481, 1615, 3605
Darien Communications	1376, 1982	Empire Access	1898, 4437
Davis Communications	1376, 1877, 1982	Endeavor Communications	2254, 2586, 3426
Dawson City Television	1376, 1877, 1982	Enhanced Telecommunications	1376, 2254
DCA Cablevision	1376, 1877, 1982	Entone	3426, 2302, 1615, 1898, 4437
DDD Cablevision	1376, 1877, 1982	EnTouch	1376
Dean Hill Cable	1376, 1877, 1982	EPB of Chattanooga	0858
Dean's Cablevision	1376, 1877, 1982	EPlus Broadband	1376, 1877, 1982
Decca Cable	1376, 1877, 1982	Escape Broadband	1376, 1877, 1982
Deffner Cable TV	1376, 1877, 1982	Eston CATV Cooperative	1376, 1877, 1982
Delcambre Communications	1898, 3605	ETAN Industries	1376, 1877, 1982
Delhi Telephone	1376, 1877, 1982	ETC Communications	1376
Delta Cable	1376	Etex	2586, 2302
Demopolis CATV	1376, 1877, 1982	Evertex	2302
Denali TV	1376, 1877, 1982	Evolution	2479, 4079, 2746, 4315, 3560
Dery Telecom	1376, 1877	Evolution Digital	2479, 4079, 2746, 4315, 3560
DiamondNet	1376		
Dickey Rural Networks	1376, 1877, 1982		

ExecuLink Telecom	1376, 3426	Genex	1376, 1877, 1982
Eyecom	1376, 1877, 1982	Genuine Telecom	2254
F & B Communications	2254, 2586	Geraldine Cable TV	1376, 1877, 1982
F & B Telephone	2254, 2586	Get Real Cable	1376, 1877, 1982
FairPoint Communications	1376, 1982	GEUS	1376, 1877, 1982, 3560, 4079
Falcon Broadband	1376, 1877, 1982	Giant Communications	1376, 1877, 1982
Falls Earth Station	1376, 1877, 1982	GiCable	1376
FamilyView Cablevision	1376, 1877, 1982	Gigabit Minnesota	1998, 2254, 3028, 3426, 3605
Fannettsburg Cable TV	1376, 1877, 1982	Giles-Craig Communications	1376, 1877, 1982
Farmer & Merchant Mutual	1376, 1877, 1982	Gilmer Cable Television	1376, 1877, 1982
Farmer's Telephone Cooperative	1998, 3028	Glandorf Telephone	1481, 1615, 1898, 2254, 2586
Farmers Cooperative Telephone Company	1376, 1877, 1982	Glasgow Electric Plant Board	1376, 1877, 1982
Farmers Independent Telephone	1376, 1877, 1982	Glass Antenna Systems	1376, 1877, 1982
Farmers Mutual Telephone	3605, 1376, 1877, 1982	Glenwood Telecommunications	1376
Farmers Telecommunications Cooperative	3028	Glide Cablevision	1376, 1877, 1982
Farmtel Communications	1376, 1877, 1982	Globalcom	1376, 1877, 1982
FCNQ	1376	Golden Belt Telephone	2254, 2586
Federated Telephone	1376	Golden Communications	1376, 1877, 1982
Fenton Cablevision	1376, 1877, 1982	Golden Rain Foundation	1376, 1877, 1982
FiberCast Cable Communications	1376, 1877, 1982	Golden Valley Cable	1376, 1877, 1982
FiberFlex Media	2254, 3605	Golden West Telecommunications	1376, 1877, 1982
FiberNet Monticello	1376, 1877, 1982	Goldfield Communications	1376, 1877, 1982
Fibrant	1376, 1877, 1982	Google	3666
Fidelity Communications	1376	Google Fiber	3666
First Cable Of Missouri	1376, 1877, 1982	Gorge Networks	1376, 1877, 1982
FirstMile	1376, 1877, 1982	Gorham Communications	1481, 2482
FirstMile Technologies	1376, 1877, 1982	Gosfield North Communications	1998, 2254, 3028, 3426, 3605
Flint Cable TV	1376, 1877, 1982	Gowrie Cablevision	1376, 1877, 1982
Florida Cable	1376, 1877	Grafton Cable Communications	1376, 1877, 1982
Foothills Broadband	1877	Grand Mound Cooperative Tel	1998, 2254, 3028, 3426, 3605
Foresite Wireless	1376, 1982	Grand River Cable	1376, 1877, 1982
Forsyth CableNet	1376, 1877, 1982	Grande Communications	1877, 3560, 1376
Fort Jennings Communications	2586	Grantsburg Telcom	1376, 1877, 1982
Fort Randall Telephone Company	1376, 1982	Great Plains Communications	1376
Fort Towson Cable	1376, 1877, 1982	GreatWave Communications	1376, 1877, 1982
Fosston Cable TV	1376, 1877, 1982	Green Hills Communications	1376, 1877, 1982
Foster Communications	1376, 1877, 1982	Greene County Cable TV	1376, 1877, 1982
Frank Howard TV Cable	1376, 1877, 1982	Greenfield Communications	1376, 1982, 0775
Frankfort Plant Board Cable	1376	Greenlight Community Broadband	1376, 1877, 1982
Franklin Telephone Company	1376, 1877, 1982	Gridley Cable	1376, 1877, 1982
Frontier	2378, 1998, 3560, 0775	Griswold Cooperative Telephone	1481, 1998, 2254, 2302, 2482, 3028
Frontier Communications	2378, 1998, 3560, 0775	Grove Cable	1376, 1877, 1982
FTC	1982, 1376, 1877	Grundy Center Utilities	1376, 1877
Full Channel TV	1376, 1877, 1982	GTA Digital TV	2345
Full Choice Communications	1376, 1877, 1982	GTel	1898, 3605
Fusion Broadband	1376, 1877, 1982	GTI	1481, 1998, 2302, 2482, 3028
Futuristic Cablevision	1376, 1877, 1982	Guadalupe Valley	1877, 2187
Fédération des coopératives du Nouveau-Québec	1376	Guy Chouinard Câble/TV	1376
Gainesboro CATV	1376, 1877, 1982	GVTC	1877, 2187
Galaxy American Communication	1376, 1877, 1982	H & B Cable Service	2482
Galaxy Cable	1376, 1877, 1982	Haefele TV	1376, 1877, 1982
Gamewood	2254, 3605	Haines Cable TV	1376, 1877, 1982
Garden Valley Technologies	1376, 1877, 1982	Hall Beach Cooperative	1376, 1877, 1982
Garden Valley Telephone	2302	Halstad Telephone Company	3028
Gardonville Cooperative Telephone	0775, 1998, 2302	Hamilton County Cable TV	1982, 1376, 1877
Gatehouse Networks	1376, 1877, 1982	Hancel	1376, 1877, 1982
Gauthier Cablevision & Electric	1376, 1877, 1982	Hancock Telecom	2254
GCI	3560, 1376, 1877		
General Communications	3560, 1376, 1877		

Hanson Communications	1376, 1877, 1982	HTC Services	1376, 1877, 1982
Hardy Telecommunications	3605	HTS	0775
Hardy TV	3605	Huawei	4589, 1982, 4883
Hargray	1877, 1376, 1982	Hughes Network Systems	1377
Harlan Community TV	1376	Humax	1377, 1877, 3560
Harlan Municipal Utilities	1376	HunTel Systems	1376
Harmony Cable TV	1376, 1877, 1982	HuronTel	3426, 1898, 3605
Harris Broadband	1376	Huxley Communications	1376, 1877, 1982
Harrisonville Telephone	2254, 2586	Hydaburg Cable TV	1376, 1877, 1982
Harron Metrocast	1376, 1877	HYDE County Cablevision	1376, 1877, 1982
Hart Cable	1376, 1877, 1982	I-Speed	1376, 1877, 1982
Hart Electric	1376, 1877, 1982	I3 Broadband	1376, 1877, 1982
Hart Telephone Company	1376	ICE Cable Holdings	1376, 1951
Hartelco	1376, 1877, 1982	ICS Communications	1376, 1877, 1982
Hastings Cable Vision	1376, 1877, 1982	ICSI Cable	1376
Hawaiian Telcom	3028	iFiber Communications	2254
Hawarden HITEC Cable	1376, 1877, 1982	IHR Telecom	3426, 4437
Hawkeye Telephone Company	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Ile-a-la-Crosse Communications Society Inc.	1376
Hay Communications	3426	Illini Cablevision Of Illinois	1376, 1877, 1982
Hayneville Telephone Company	1998, 2254, 3028, 3426, 3605	ImOn Communications	1877
HBC	1376, 1877, 1982	Indco Cable TV	1376, 1877, 1982
HBL Communications	1376, 1877, 1982	Independence County Cable	1376, 1877, 1982
HCS	1376, 1877, 1982	Independence Light & Power	1376, 1877, 1982
Healthcare Cable Systems	1376, 1877, 1982	Independence Telecom Utility	1376, 1982
Heart of Iowa Communications	1376, 1877, 1982	Independent Cable Systems of Idaho	1376, 1877, 1982
Heartland Cable	1376, 1877, 1982	Indevideo	1376, 1877, 1982
Heartland Technology	1376, 1877, 1982	Index Cable TV	1376, 1877, 1982
Heartland Wireless Communications	1376, 1877, 1982	IndyTel	1376, 1877, 1982
Heck's TV & Cable	1376, 1877, 1982	Innovative Cable TV	1376
Henderson Telephone	1376, 1877, 1982	Innovative Systems	1376, 1898
Hermosa Cablevision	1376, 1877, 1982	Inside Connect Cable	1376
Herr Cable	1376, 1877, 1982	Integra Telecom	2345
HFU Television	1376, 1877, 1982	Intelliwave	1998, 2254, 3028, 3426, 3605
Hiawatha Broadband	1376, 1877, 1982	Inter Mountain Cable	1877, 2479, 4079, 2826, 3294
HickoryTech	1898, 1951, 2302	Inter-County Cable	1376, 1877, 1982
High Plains Cablevision	1376, 1877, 1982	Interstate Cablevision	1481, 1998, 2254, 2302, 2482, 3028
Highland	1877, 1376, 1982	Interstate Telecommunications Cooperative	2254, 2302
Highland Telephone Cooperative	1877, 1376, 1982	Intertech Private Cable	1376, 1877, 1982
Hightong	1376	InTouch	1998, 2254, 3028, 3426, 3605
Hill Top Communications	1376, 1877, 1982	Iowa Network Services	2302
Hillsboro Telephone	1998, 2254, 3028, 3426, 3605	Iron River Cooperative TV	1376, 1877, 1982
Hinton CATV	1376, 1877, 1982	Irvine Community TV	1376, 1877, 1982
HLM Cable Corp	1376, 1877, 1982	Izzi Mexico	1376, 6195, 4375, 4537
Home Communications	1376, 1877, 1982	Izzi Telecom	1376, 6195, 4375, 4537
Home Telecom	1376, 3426, 4437	J & L Cable	1376, 1877, 1982
HomeTel	1376	J & N Cable	1376, 1877, 1982
Hometown Cable	1376, 1877, 1982	Jack McClanahan Cable TV	1376, 1877, 1982
Hometown Utilicom	1376, 1877, 1982	Jackson Energy Authority	1376, 1877, 1982
Hood Canal Cablevision	1376	Jaguar Communications	1376, 1877, 1982
Hoonah Community Television	1376, 1877, 1982	James Cable Partners	1376, 1877, 1982
Hooper Telephone	1376, 1877, 1982	James Valley Cooperative Telephone	2254, 2586
Horizon Cable TV	1376, 2254, 2586	Jayroc Cablevision	1376, 1877, 1982
Horizon Telecom	2254, 2586	Jefferson County Cable	1376, 1877, 1982
Horry Telephone Cooperative	1376, 1877, 1982	Jefferson Telecom	1376, 1877, 1982
Hospers Telephone	1376, 1877, 1982	Jeffersonville Cable TV	1376, 1877, 1982
HOT - Homeland Optical Technology	1376, 1877, 1982	Jerrold	0869
Hotwire	2254, 2586		
Houston Cable	1376, 1877, 1982		
HTC Communications	1481, 1998, 2302, 2482, 3028		

STB

Jet Broadband	1376	Laurel Highland	1376, 1877, 1982, 2187
Johnston County Cable	1376, 1877, 1982	Laurens Municipal Cable TV	1376, 1877, 1982
Journeyvision Cable	1376, 1877, 1982	LaValle Telephone Cooperative	2254, 2586
JVC	0775	Layer3 TV	5370, 1998
K-Communications	1376, 1877, 1982	LB Cable	1376, 1877, 1982
K2 Communications	3560	Lehigh Valley Cooperative Telephone	1376, 1877, 1982
Kalida Telephone	1376, 1877, 1982, 2254	Lemonweir Valley Telephone	1481, 1998, 2302, 2482, 3028
Kalona Cooperative Telephone	2254, 2586	Lenox Municipal Cable	1376, 1877, 1982
Kaltelco	1481, 1998, 2302, 2482, 3028	Levan Town Cablesystems	1376, 1877, 1982
Kaon	2746, 4458	Lewiston Communications	1376, 1877, 1982
Kaon Media	2746, 4458	Lexcom Cable Services	1376, 1877, 1982
Kaplan Telephone	2254, 2586	LG	1377
Karban TV Systems	1376, 1877, 1982	LHTC	1376, 1877, 1982, 2187
KAS Cable TV	1376, 1877, 1982	LHTC Broadband	1998, 2254, 3028, 3426, 3605
Kaslo Cable	1376, 1877, 1982	Liberty Cablevision	1376
Kawartha Cable	1376, 1998, 2254, 3028, 3426, 3605	Liberty Communications	1481, 2254, 2302, 2586, 3605
KBS Cable TV	1376	Lighthouse.Net	1376, 1877, 1982
Keene Valley Video	1376, 1877, 1982	LightStream	1998, 2254, 3028, 3426, 3605
Kelley Communications	1376, 1877, 1982	LigTel	1998, 2254, 3028, 3426, 3605
Kennebec Telephone	1376, 1877, 1982	Limestone Cablevision	1376, 1877, 1982
Kennedy Cablevision	1376, 1877, 1982	Lincoln Cable Television	1376
Kentucky Ridge Country Communications	1376, 1877, 1982	Lincolnvillle	1376
Keta Cable	1376, 1877, 1982	Lindsey Communications	1376, 1877, 1982
KFW Communications	1376, 1877, 1982	LISCO	1376, 1877, 1982
Kincardine Cable TV	1376	Litestream Holdings	1376, 1877, 1982
Kings Bay Communications	1376, 1877, 1982	LivCom	1998, 2254, 3028, 3426, 3605
KLIP	1376, 1877, 1982	Livingston Communications	1998, 2254, 3028, 3426, 3605
KM Telecom	1481	LNE Communications	1376, 1877, 1982, 3605
KoolConnect	1481	LNE Telco	1376, 1877, 1982, 3605
Koomiut Cooperative	1376, 1877, 1982	Localtel	1376, 1877, 1982
KPU Telecommunications	1615, 1898, 2302, 3426, 3605	Lockesburg Cablevision	1376, 1877
Kraus Electronic Systems	1376, 1877, 1982	LodgeNet	1376, 1877
Kudzu Cable TV	1376, 1877, 1982	Lodgenet Entertainment	1376, 1877
Kugluktuk Cooperative	1376, 1877, 1982	Lone Pine Cable TV	1376, 1877, 1982
Kuhn Communications	1376, 1877	Longview Communications	1376, 1877, 1982, 4079
L & J Cable	1376, 1877, 1982	Lonsdale Video Ventures	1481, 1998, 2254, 2302, 2482, 3028
La Harpe Communications	1376, 1877, 1982	Loretel Cablevision	1376, 1877, 1982
La Harpe Video and Data Services	1376, 1877	Loretel Systems	1376
Lafayette Utilities System	1376, 1951, 1998	Lost Island Cable TV	1376, 1877, 1982
Laguna Serrano Cable	1376, 1877, 1982	LPC Connect	1898
Lake Cable	1376, 1877, 1982	Lucas Valley Cable	3560
Lake Connections	1898, 3605	Lumos Networks	1998, 3028
Lake Las Vegas Communications	1376, 1877, 1982	LUS Fiber	1998, 3028
Lake Livingston Telephone	1998, 2254, 3028, 3426, 3605	Lycom Communications	1376, 1877, 1982
Lake Region Technology & Communications	3426, 4437	M-Tek Systems	1376, 1877, 1982
Lakeland Cablevision	1376, 1481, 1877, 1982, 1998, 2254, 2302, 2482	M.T.C. Cable	1376, 1877, 1982
Lakeland Telecom	1481, 1998, 2254, 2302, 2482, 3028	Maddock Cable TV	1376, 1877, 1982
Lakeview Cable	1376, 1877, 1982	Madison Communications	1376, 1982
Lamont Digital Systems	1376, 1877, 1982	Madison County Cable	1376, 1877, 1982
LaMotte	1998, 2254, 3028, 3426, 3605	Mahaska Communications	1376, 1877, 1982
Lang	1376, 1877, 1982	Mainstreet Communications	1376, 1877, 1982
Lansdowne Telephone	1998, 2254, 3028, 3426, 3605	Maitland Cable TV	1376, 1877, 1982

STB

Mallard Cable	1376, 1877, 1982	Midco	1376, 1982, 3560, 2826, 4079
Manawa Telecom	2254, 2586	Midcontinent Communications	1376, 1982, 3560, 2826, 4079
Manning Municipal Utilities	1376, 1877, 1982	Midstate Communications	1376, 1877, 1982
Manti Telecom	1481, 1998, 2254, 2302, 2482, 3028	Midtel Cable TV	1376, 1877, 1982
Mapleton Communications	1376, 1877, 1982	Milaca Local Link	1376, 1877, 1982
Marco Island Cable	1376, 1877, 1982	Milcom Cable	1376, 1877, 1982
Markdale Cable TV	1376	Milestone Communications	1982, 0775
Marne & Elk Horn Telephone	1376, 1877, 1982	Milford Cable TV	1376, 1877, 1982
Marquette-Adams Telephone	1376, 1877, 1982	Milford Communications	1376, 1877, 1982
Martell Cable	1376, 1877, 1982	Milk River Cable Club	1376, 1877, 1982
Martelle Communications Cooperative	1376, 1877, 1982	Millennium Telecom	1481, 1998, 2302, 2482, 3028
Mascon Cable	1376	Millheim TV Transmission	1376, 1877, 1982
Maskatel	1898, 3605	Millington CATV	1376, 1877, 1982
Masset-Haida TV Society	1376, 1877, 1982	Minburn Communications	1481, 1998, 2302, 2482, 3028
Massillon Cable	1376, 2187	Minerva Networks	3118
Master Vision Cable	1376, 1877, 1982	Minerva Valley Cable	1376, 1877, 1982
Matanuska Telephone Association	1481, 2254, 2482, 2586	MINET	1877
Matrix Cablevision	1376, 1877, 1982	Minford Telephone Company	3426, 3605
Mattawamkeag Cablevision	1376, 1877, 1982	Mitchell Telecom	1898, 2254, 2586, 3605
Maxcom	1998	MLGC	1376
MaxxSouth	1376	MLGC Cable TV	1376, 1877, 1982
McDonough Telephone Cooperative	1376, 1877, 1982	MM&G Enterprises	1481, 1998, 2302, 2482, 3028
McKee TV Enterprises	1376, 1877, 1982	MMDS Wireless East	1376, 1877, 1982
McNabb Cable	1376, 1877, 1982	Mobius Communications	1376, 1877, 1982
MCTV	1376, 2187	Monroe Cablevision	1376, 1877, 1982
McVille Cable System	1376, 1877, 1982	Monroe Utilities	1376, 1877, 1982
Mechanicsville Telephone Company	1376, 1877, 1982	Montana Opticom	1376, 1877, 1982
Media Cast	1376, 1982	Montana Sky Networks	0775
Media One	1376, 1877, 1982	Moosehead Enterprises	1376, 1877, 1982
Mediacom	1376, 3560, 1982, 1877	Mornington Communications	3426
Mediapolis Telephone	1376, 1982	Morris Broadband	1376
Mediastream	1376	Morristown Utility Systems	1877
Megacable	1376, 4374, 4450, 4514, 4375, 4537, 4883	Mosaic Telecom	1376, 2586
Merrimac Communications	1376	Motorola	1376, 0869, 2378, 1998, 1951, 0858, 1982, 4375, 5097, 3469
Metlakatla Indian Community TV	1376, 1877	Moultrie Telecommunications	1376, 1877, 1982
Metro Loop	3605	Mountain Shadows Cable TV	1376, 1877, 1982
MetroNet	1998, 0858	Mountain Telecommunications	1376, 1877, 1982
Metropolitan Cable	1376, 1877, 1982	Mountain Telephone	1376, 1877, 1982, 3426, 4437
MGS Cablevision	1376, 1877, 1982	Mountain Zone TV	1376, 1877, 1982
MHTC	1481, 1998, 2254, 2302, 2482, 3028	Moxi	2187
Mi-Connection	1877	Mt. Baker Cable	1376, 1877, 1982
Mlcom	1376, 1877, 1982	MTA	1481, 2254, 2482, 2586
Microwave Satellite Technologies	1481, 1998, 2254, 2302, 2482, 3028	MTC Communications	1376, 1982
Mid Century Telecom	1481, 1615	MTC Mutual	2482
Mid Missouri Broadband & Cable	1376, 1877, 1982	MTC Technologies	1376, 1982
Mid Missouri Telephone	1376, 1877, 1982	MTCO Communications	2254
Mid-Coast Cablevision	1376, 1877, 1982	Mulberry Telecommunications	2254, 3426
Mid-Hudson Cable	1376	Multiband Cable	1376, 1877, 1982
Mid-Plains Rural Telephone Cooperative	3028	Municipality Cable Operator	1376, 1877, 1982
Mid-Rivers Communications	1376	Murphy Cable	1376, 1877
Mid-South Cablevision	1376, 1877, 1982	Murray Electric System	1376, 1877, 1982
Mid-State Community TV	3560	Muscatine Power & Water	1376, 3426, 3605, 4375
Midamerican Cable Systems	1376, 1877, 1982	N.W. Communications	1376, 1877, 1982

Natco Communications	1998, 2254, 3028, 3426, 3605	North Star Cablevision	1376, 1877, 1982
National Cable	1376, 1877, 1982	North State Communications	0858, 3028
Naujat Cooperative	1376, 1877, 1982	North Texas Broadband	1376, 1877, 1982
NDTC	1481, 1998, 2302, 2482, 3028	North Yellowstone Cable TV	1376, 1877, 1982
Nebraska Central Telecom	1376, 1877, 1982	Northeast Nebraska Telephone Company	1898, 3605
NEC	1377	Northern Cable Holdings	1376, 1877, 1982
NEIT	1376, 1877, 1982	Northern Lakes Cable TV	1376, 1877, 1982
Nelson County Cablevision	1376, 1877, 1982, 3560	Northerntel	0775
Nelsonville TV Cable	1376, 1877, 1982	Northland Cable TV	3560
Nemont Communications	1376, 1877	Northland Communications	1376
NEMR Telecom	1898	Northpenn	2254, 2586
NEOTech	4596	Northside TV	1376, 1877, 1982
New Century Communication	1376, 1877, 1982	Northstar Broadband	1376, 1877, 1982
New Day Broadband	1376, 1877, 1982	Northwest Communications	1376, 1877, 1982
New England Cable	1376, 1877, 1982	Northwest Community	1877
New Hope Telephone	2302	Northwest Telephone Cooperative	1376, 1877, 1982
New Jersey Broadband	1376, 1877, 1982	NorthwesTel	1376
New Knoxville Cable Systems	1376, 1877, 1982	Norvado	2254, 2302, 2586
New Lisbon Broadband and Communications	1998, 2254, 3028, 3426, 3605	Norwood Light Broadband	1376
New North Networks	1376, 1877, 1982	Nova Cable Management	1376, 1877, 1982
New Paris Quality Cablevision	1376, 1877, 1982	Nova Cablevision	1376, 1877, 1982
New Visions Communications	1376, 1877, 1982	Novus	1376, 1877
New Windsor Telephone	1376, 1877, 1982, 2302	NPG Cable	1376
Newcastle Cablevision	1376, 1877, 1982	Nsight	2254, 2302, 2345, 2586
NewDawn Fiber	1998, 2254, 3028, 3426, 3605	NTC Cable Services	1376, 1877, 1982
Newpath Communications	1877, 1982	nTelos	1998
NewWave Communications	1376, 2187	NTS Communications	1376, 1877, 1982
Nex-Tech	2482	NU Telecom	1998, 3028
NexGen	1376, 1877, 1982	NuLink	1376, 1877, 1982
NexHorizon Communications	1376, 1877, 1982	Nushagak Cooperative	1376, 1877, 1982
Nexicom Communications	1376, 1877, 1982	Nuvera	1998, 3028
NextGen Communications	1376	NuVisions	0775
NfinityLink Communications	1376, 1982	NVC	2254
NFTC	1998, 2254, 3028, 3426, 3605	O-Net	1898, 3426, 3605
Niagara Community TV Cooperative	1376, 1877, 1982	Oak Cable Systems Of Iowa	1376, 1877, 1982
NICP	1998, 2254, 3028, 3426, 3605	Oak Hill Cablevision	1376, 1877, 1982
Nimpkish Valley Communications	1376, 1877, 1982	Oakview Cable	1376, 1982
NineStar Connect	2254, 3426, 4437	Oasis Communications	1376, 1877, 1982
Nittany Media	1376, 1951	Ogden Telephone	1998, 2254, 3028, 3426, 3605
NKTelco	3426, 1615, 1898, 1376	Olin-Morley Telephone Company	1376, 1877, 1982
Nor-Cal Cable Systems	1376, 1877, 1982	Omni III Cable TV	1376, 1877, 1982
Nor-Del Cablevision	3560, 2479	OmniTel Communications	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Nortex Communications	1376, 1877, 1982	Oneida Cablevision	1376, 1877, 1982
North American Communications	1376, 1877, 1982	OneLink	1376, 1877, 1982
North Central Telephone	2302, 2345	OneSource Communications	1376
North Crossroads Communications	1376, 1877, 1982	Opelika Power Services	1998, 2254, 3028, 3426, 3605
North Dakota Telephone	2586	OpenBand of Virginia	1998, 2254, 3028, 3426, 3605
North Eastern Penn Telephone	2302	Opp Cablevision	1376, 1877, 1982
North Frontenac Telephone Company	1998, 2254, 3028, 3426, 3605	Optic Communications	1376, 1877, 1982
North Nova Cable	1877, 1982	OptiLink	1877
		Optimum	3885, 1376
		Orbitel Communications	1376
		Oregon Cable Group	1376, 1877, 1982
		Orion Broadband	1376, 1877, 1982
		Orion Cablesystems	1376, 1877, 1982
		Osage Municipal Utilities	1376, 1877, 1982

STB

Otec Communication	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Pine River Cable	1376, 1877, 1982
OTEC Communications	2254, 2586	Pine Tree Cablevision	1376, 1877, 1982
Otelco	2302	Pineland Telephone Cooperative	1898, 1481, 1615, 2254, 2586
OTZ Telecom	1998, 2254, 3028, 3426, 3605	Pineville Communication Systems	2254
OTZ Telephone Cooperative Inc	1998, 2254, 3028, 3426, 3605	Pinpoint Communications	1376, 1877, 1982
Our Cable	1376, 1877, 1982	Pioneer	1877
Overton County Cable	1376, 1877, 1982	Pioneer Broadband	1376, 1877, 1982
Oxford Networks	1376, 1877, 1982	Pioneer Cable	1376, 1877, 1982
Ozarks Go	1998	Pioneer Communications	1376, 1877, 1982
Ozona Cable & Broadband	1376, 1982	Pioneer Long Distance	1898, 2302
Pace	1982, 1376, 1377, 1877, 3469, 3560, 1998, 0858, 6195, 4537, 5370	Pioneer Telephone	2254, 2302
Packerland Broadband	1376	Pitcairn Community Cable TV	1376, 1877, 1982
Paleajook Cooperative	1376, 1877, 1982	Plant Communication	1376, 1877, 1982
Palmer Mutual Telephone	1376, 1877, 1982	Plantation Cable System	1376, 1877, 1982
Palmetto Rural Telephone Cooperative	0858	Plateau	3028
Palo Cooperative Telephone Association	3426, 4437	Pleasant Vision	1376, 1877, 1982
Panasonic	1982	Polar Communications	2254, 2586
Pangnirtung Cooperative	1376, 1877, 1982	Polaris Cable	1376, 1877, 1982
Panhandle Telephone	1376	Ponderosa Cablevision	1376, 1877, 1982
Panora Telecommunications	1481, 2482	Poplar Bluff Municipal Utilities	1481, 1998, 2302, 2482, 3028
Paragould Light & Water	1376, 1877, 1982	Portal Cablevision	1376, 1877, 1982
Parish Communications	1376, 1877, 1982	Post Cablevision	1376, 1877, 1982
Park Region Mutual Telephone	1481, 1998, 2302, 2345, 3028	Potelco	1998
Park TV & Electronics	1376, 1877, 1982	Pottawatomie Telephone Company	1998
Partner Communications	1376, 1877, 1982	Premier Communications	1376
Passcom Cable	1376, 1877, 1982	Price County Telephone	1481, 1998, 2254, 2302, 2482, 3028
Pathway Com-Tel	1376, 1877, 1982	Prime Cable Corporation	1376, 1877, 1982
Patterson Cable TV	1376, 1877, 1982	Prime Time Cable	1376, 1877, 1982
Paul Bunyan Communications	2254, 2586	Princetown Cable	1376, 1877, 1982
Paul Communications	1376, 1877	Private Cable Systems	1376, 1877, 1982
PBT Cable Services	1376, 1877, 1982	Private Network Cable Systems	1376, 1877, 1982
PC One Cable	1376, 1877, 1982	Progressive Rural Telephone	1376, 1877, 1982
PDQ Cable TV	1376, 1877, 1982	Project Mutual Telephone	1481, 1898, 1998, 2302, 2482, 3028, 3605, 4437
PEC Cablevision	1376, 1877, 1982	Project Services	1376, 1877, 1982
Pegasus Communications	1376, 1877, 1982	Provincial Cable	1376, 1982
Pembroke Advanced Communications	1998, 2254, 3028, 3426, 3605	PSC	1481, 1998, 2302, 2482, 3028
PennVideo Network	3560	PTCI	1376
Peoples CATV	1376, 1877, 1982	PVT Networks	1376, 1877, 1982
Peoples Rural Telephone Cooperative	1376	Quadro Communications Cooperative	1376
Persona Communications	1376, 1877, 1982	Quality Cable TV	1376, 1877, 1982, 2482
PES Energize	4437	Quality One Technologies	1481, 1998, 2302, 2482, 3028
Philippi Communications	1376, 1877, 1982	QuantumVu	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Philips	1377, 2619, 2378, 3560, 3469	Quinter Cable	1376, 1877, 1982
Phoenix	1376	Qwest	1377
Phoenix Cable	1376, 1877, 1982	R & R Cable	1376
Phonoscope Communications	1376, 1877, 1982	R Tec Communications	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605
Pickwick Cablevision	1376, 1877, 1982	Radcliffe Telephone	1376, 1877, 1982
Piedmont Cable Services	1376, 1877, 1982	Raftview Communications	1376, 1877, 1982
Pine Belt Communications	1376, 1877, 1982	Rainbow Cable	1376, 1877, 1982
Pine Bluff Cable	1376	Rainbow Communications	1376, 1877, 1982
Pine Island Telephone	1481, 1998, 2254, 2302, 2482, 3028	Rainbow Lake Cable TV	1376, 1877, 1982

Rainier Connect	1376, 1877, 1982	RS Fiber	1998, 2254, 3028, 3426, 3605
Ramapo Cable	1376, 1877, 1982	RTC	1376, 1877, 1982
Rancho Murieta Association	1376	RTEC Communications	1376, 1877, 1982
Randolph Communications	2254, 4437	RTI Telecom	1376
Randolph Telephone	2254, 2586	Runestone Telcom	1376, 1877, 1982
Rapid Communications	1376, 1877, 1982	Rural Route Video	1376, 1877, 1982
RC Communications	1376, 1877, 1982	Rural Telephone Company	1376
RC Technologies	1376, 1877, 1982	RuralWave	1376, 1998, 2254, 3028, 3426, 3605
RCN	1376, 3560, 1877	RuralWest	1376, 1877, 1982
Reach Broadband	1376, 1877, 1982	Russell Municipal Cable TV	1376, 1877, 1982
Readlyn Telephone	2586	Russellville Electric Plant Board	2586
Rebeltec Communications	1376, 1877, 1982	S & K TV Systems	1376, 1877, 1982
Red River Cable	1376, 1877, 1982	S & T Communications	1376, 1877, 1982
Red River Communications	1998, 2254, 3028, 3426, 3605, 1376, 1877, 1982	S-GO Video	1877, 1982
Reds Cable TV	1376, 1877, 1982	S. Bryer Cable TV	1376, 1877, 1982
Regional Cable TV	1376, 1877, 1982	Sac County Mutual Telephone	1376, 1982
Reinbeck Telecommunications	1376, 1877, 1982	Sagemcom	3885
Reliance	1376, 1877	Salem Cable Vision	1376, 1877, 1982
Reliance Connects	1376, 1877, 1982	Sallisaw Municipal Authority	1376, 1877, 1982
Relyant Communications	4437	Salsgiver Communications	1998, 2254, 3028, 3426, 3605
Reservation Telephone	1376, 1998, 2345	Samsung	1377, 1877, 1982, 2947, 3928, 6268
Reserve Long Distance	1376, 1877, 1982	San Bruno Municipal Cable TV	1376, 1877, 1982
Resnet Communications	1376, 1877, 1982	San Carlos Cablevision	1376, 1877, 1982
Resort Cable	1376	San Juan Cable	1376, 1877, 1982
Reveille Broadband	1376, 1877, 1982	San Simeon Community Cable	1376, 1877, 1982
Revelstoke Cable	1376	Sand Creek Communications	1998, 2254, 3028, 3426, 3605
Reynolds Cable	1376, 1877, 1982	Sandhill Telephone Coop	1998, 2254, 3028, 3426, 3605
Reynolds Telephone Company	1998, 2254, 3028, 3426, 3605	Santa Rosa Telephone	1998, 2254, 3028, 3426, 3605
RGA Cable	1376, 1877, 1982	Santel Comm Cooperative	1376, 1877, 1982
Richland Grant Telephone Cooperative	1376, 1877, 1982	SaskTel	1998
Ridgeville Telephone Company	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Satco Cable TV	1376, 1877, 1982
Ridgewood Cablevision	1376, 1877, 1982	Satellite Cable Services	1376, 1877, 1982
Ringgold Telephone	1376, 1877, 1982	Satellite Operations	0775
RingTel Communications	1376, 1877, 1982, 1998, 2254, 3028, 3426, 3605	Satellite TV Systems	0775
Rio Virgin Telephone	1376, 1877, 1982	Satview Broadband	1376, 1877, 1982
Riondel Community Cable Society	1376, 1877, 1982	Saugeen Telecable	1376, 1877, 1982
Ripley Video Cable	1376, 1877, 1982	Savage Communications	1376, 1877, 1982
Ritter Cable	1376, 1877, 1982	Sayward Valley Communications	1376, 1877, 1982
River Road Cable	1376, 1877, 1982	Schindler Cable TV	1376, 1877, 1982
River Valley Cable TV	1376, 1877, 1982	Schurz Communications	1376, 1982
River Valley Telecommunications	1481, 1998, 2254, 2302, 2482, 3028, 1376, 1877, 1982	SCI Cable	1376, 1877, 1982
Riverside Cablevision	1376, 1877, 1982	Scientific Atlanta	1877, 0858, 1982, 2345, 3028, 2378, 2826
Riviera Cable TV	1376, 1877, 1982	Scio Cablevision	1376, 1877, 1982
Robins Cable TV	1376, 1877, 1982	Scott County Telephone Cooperative	1376, 1877, 1982
Rock Port Cablevision	1376, 1877, 1982	Scott Telecom And Electronics	1376, 1877, 1982
Rockwell Cooperative Telephone Association	1376, 1877, 1982	Scottsboro Cable TV	1376, 1877, 1982
Rocky Mountain Cable Systems	1376, 1877, 1982	Scranton Telephone Company	1998, 2254, 3028, 3426, 3605
Rogers	1877, 1376, 5484, 2826, 3294, 4537	Sea Island	1877
Roome Telecommunications	1376, 1877, 1982	Seaside Cable TV	1376, 1877, 1982
Royal Telephone	1376, 1877, 1982	Seaview Communications	1376, 1877, 1982
Royal Telephone Company	1998, 2254, 3028, 3426, 3605, 1376, 1877, 1982	SecureVision	1376, 1877, 1982
		SEI Robotics	1376
		Selco	1376, 1877, 2826, 3560
		Semo Communications	1376, 1877, 1982

STB

Senior TV	1376, 1877, 1982	Southern Plains Cable	1376, 1877, 1982
Service Electric	1376, 1982, 1877, 2187	Southern Vermont Cable	1376, 1982
Service One Cable	1376, 1877, 1982	Southey Cable	1376, 1877, 1982
Shannon Vision	1376, 1877, 1982	Southside TV	1376, 1877, 1982
Sharon Telephone Company	1376, 1877, 1982, 0775	Southwest MN Broadband	1376, 1877, 1982
Shaw	1376, 1982, 2187, 1877, 4537	Southwestern Bell Video Services	1376, 1877, 1982
Shaw Direct	0869	Spanish Fork	1376, 1877, 1982
Shawano Municipal Utilities	1376, 1877, 1982	Sparklight	1376, 3560, 1877
Shellsburg Cablevision	1376, 1877, 1982	Spectrum	1877, 1376, 2187, 3560, 3294, 4537
Shen-Heights TV	1376, 1877, 1982	Spencer Municipal Utilities	1376, 1877, 1982
Shenandoah Cable	1376, 1877, 1982	Spillway Cablevision	1376, 1877, 1982
Shenandoah Telecommunications	1376, 1877, 1982	Spirit Broadband	1376, 1877, 1982
Shentel	1376, 1877, 1982, 2187	Spring City Cable	1376, 1877, 1982
Sherburne Cable	1376, 1877, 1982	Spring Creek Cable	1376, 1877, 1982
Sherman Cablevision	1376, 1877, 1982	Spring Grove Communications	2254
Shrewsbury Electric & Cable	1376, 1877, 2826, 3560	Springcom	1376, 1877, 1982
Silver Star Communications	1481, 1998, 2302, 2482, 3028	Springfield Cablevision	1376, 1877, 1982
Simpson Country Cable TV	1376, 1877, 1982	Springville Cable	1376, 1877, 1982
Siren Telephone Company	1998, 2254, 3028, 3426, 3605	Spruce Knob Seneca Rocks Telephone	1998, 2254, 3028, 3426, 3605
Siskiyou Cablevision	1376, 1877, 1982	SRT Communications	1376, 1998
Sister Lakes Cable	1376, 1877, 1982	ST	0775
Sjoberg's Cable TV	1376	St. George Island Cable	1376, 1877, 1982
Skisat	1376, 1877, 1982	St. John Cable	1376, 1877, 1982
SKT	1376, 1877, 1982	Stanley Cablevision	1376, 1877, 1982
Sky Cablevision	1376, 1877, 1982	Stanton Telecom	1376, 1877, 1982
Sky Mexico	3469, 2619, 1377	Star Cablevision	1376, 1877, 1982
SkyBest TV	2586	Star Choice	0869
SkyFiNet	1998, 2254, 3028, 3426, 3605	Star Communications	2254, 3426, 4437
Skyline Cable	2254, 2586	Starkville Cablevision	1376, 1877, 1982
SkyLine TMC	2586	Starlight Communications	1376, 1877, 1982
SkyPix	1481, 1998, 2302, 2482, 3028	Starview Cable of Delaware	1376, 1877, 1982
Skyworth	1376	StarVision	1376, 1877, 1982
Sleepy Eye Telephone	2345	Starwest	1376, 1877, 1982
Slic Network	3426, 4437	Stellar Communications	1376, 1877, 1982
Small Town Cable	1376, 1877, 1982	Stellar Private Cable Systems	1376, 1877, 1982
Smithville	2586	Sterling Cable	1376, 1982
Socket TV	1898, 3426, 3605	STMicroelectronics	0775
Sogetel	1998, 2482	Stowe Cablevision	1376, 1877, 1982
Solarus	3028	Strata Networks	1376, 1877, 3560
Somerfield Cable TV	1376, 1877, 1982	Strategic Technologies	1376, 1877, 1982
Source Cable	1376	Stratford Mutual Telephone	1376, 1982
South Benton Cablevision	1376, 1877, 1982	Stubbs Communications	1376, 1877, 1982
South Central Communications	1376, 1877, 1982	Suddenlink	1877, 1376, 3560, 3885, 1982
South Central RTC	1951	Summit Broadband	1376, 1877, 1982
South Holt Cablevision	1376, 1877, 1982	Summit Communications	1376, 1877, 1982
South Island Cable	1376	Sumner Cable TV	1376, 1877, 1982
South Kountry Cable	1376	Sun Country Cable	1376
South Slope Communications	1376, 1877, 1982	Sunrise Communications	1376, 1877, 1982
Southeast Cable TV	1376, 1877, 1982	Sunset Digital Communications	1998, 2254, 3028, 3426, 3605
Southeast Nebraska Communications	3605	Superior Cable & Data	1376, 1877, 1982
Southern Cayuga County Cable	1376, 1877, 1982	Supervision Cable TV	1376, 1877, 1982
Southern Coastal Cable	1376, 1877, 1982	Surry Telephone	2254, 2586
Southern Kansas Telephone	1376	SWAT Cooperative	1481, 1998, 2302, 2482, 3028
Southern Montana Telephone	1998, 2254, 3028, 3426, 3605	Swayzee Communications	1376, 1877, 1982
		Sweetwater Cable TV	1376, 1877, 1982
		Swiftel	2302, 3426, 3605, 4437
		Swisher Telephone	2345
		Sycamore Telephone Company	1998, 2254, 3028, 3426, 3605

STB

TA Communications	1376, 1877, 1982	TruVista	1376, 1877, 1982
Taloga Cable	1376, 1877, 1982	TSC Communications	2302
TAT Cablevision	1376, 1877, 1982	Tuckersmith Communications	
Tbaytel	1998	Cooperative	1376, 3426, 3605
TCSI Huntsville	1376, 1877, 1982	Tudjaat Cooperative	1376, 1877, 1982
TCT	1376, 1877, 1982	Tulalip Broadband	1376, 1877, 1982
TDS	1376, 1877, 1982	Tullahoma Utilities	2586
TDS Telecom	0775, 1376, 3028, 1877, 1982	Tulugak Cooperative	1376, 1877, 1982
Technicolor	1377, 1877, 1982, 5912, 2947, 5484, 3469, 6195	Turquoise Turtle TV	1376, 1877, 1982
Tekstar Cablevision	1376, 1877, 1982	Turtle Mountain	
Tel-Star Cablevision	1376, 1877, 1982	Communications	1998, 2254, 3028, 3426, 3605
Tele-Media	1376, 1877, 1982	TV Association of Republic	1376, 1877, 1982
Tele-Services	1376, 1877, 1982	TV Cable Company of Andalusia	1376
TeleCable	1376	TV Cable of Rensselaer	3560
Telecom Cable	1376, 1877, 1982	TV Cable of Winamac	1376, 1877, 1982
Telepak Networks	1376, 1877, 1982	TV Northeast	1481, 1998, 2302, 2482, 3028
TelePartners	1376, 1877, 1982	TV Service	1376, 1877, 1982
Telephone de Courcelles	3605	TVC	1376, 1877, 1982
Telerent Leasing Corporation	1376, 1877, 1982	TVision	1376, 1877, 1982
Telestarr Systems	1376, 1877, 1982	TVision Home	5370, 1998
Television Communications	0775	TVMAX	1376, 1877, 1982
Telsat Systems	1376, 1877, 1982	TVN	2254, 3605
TELUS	5912, 3028, 5942, 0775	TVS Cable	1376, 1877, 1982
Templeton Telephone	1376, 1877, 1982	TWC	1877, 1376, 3294, 2187, 4537
Tesco Cable TV	1376, 1877, 1982	Twin Lakes Communications	3426, 4437
Texas Mid-Gulf Cablevision	1376	Twin Valley Communications	2254, 2586
Thames Valley Communications	1376, 1877, 1982	Two Creeks Cable	1376, 1877, 1982
The Community Agency	1376	Télécabl St-Hilarion	1376, 1877
The Town of Mountain Village		Téléphone de Lambton	1998
Cable	1376, 1877, 1982	Téléphone Saint-Éphrem	3605
Thomson	1982, 3469, 2619, 1377	Téléphone Upton	3605
Three River Digital Cable	1376, 1877, 1982	U-verse	0858
Throckmorton Cablevision	1376, 1877, 1982	Ucluelet Video	1376, 1877, 1982
TiftNet	1376, 1877, 1982	Uintah Basin Electronic Telecom	1376, 1877, 1982
Time Warner	1877, 1376, 3294, 2187, 4537	UMBC	1376, 1877, 1982
Time Warner Cable	1877, 1376, 3294, 2187, 4537	Union Telephone	1376, 1877, 1982
Tip-Top Communications	1376, 1877, 1982	Unitah-Strata Networks	1376
Titanka Burt Communications	2254	United Communications	1376, 3426
TiVo	3560, 3724	United Fiber	4437
Tobacco Valley Communications	1376, 1877, 1982	United Satellite America	0775
Tongue River Cable TV	1376, 1877, 1982	United States Gypsum	1376, 1877, 1982
Topsham Communications	1898, 3605	United States Wireless	0775
Total Cable Service	1376	United Telephone	1376, 2254, 2586
Totalplay	4589	Universal Cablevision	1376, 1877, 1982
Touchet Valley Television	1376, 1877, 1982	Universal Satellite Cable	1376, 1877, 1982
Town of Imperial Cable Systems	1376, 1877	Upper Peninsula Communications	
Town of Mountain Village	1376, 1877, 1982		1376, 1877, 1982
Toxaway Cable	1376, 1982	US Online	1376, 1877, 1982
Trans-Video	1376, 1877, 1982	US Sonet	1376, 1877, 1982
TransVision Cookshire	1376, 1877	USA Cablesystems	1376, 1877, 1982
Trappers Loop Communications	1376, 1877, 1982	USA Communications	1376
Trenton Cable	1376, 1877, 1982	USA Companies	1376, 1877, 1982
Tri-County Cable TV	1376	USA Wireless Satellite TV	0775
Tri-County Communications	1376, 2254	Utica Cablevision	1376, 1877, 1982
Tri-County Telephone Association	2302	Utilities Board City of Foley	1376
Triangle Communication System	0775	Utility Systems Development	1376, 1877, 1982
TrioTel Communications	1376, 1877, 1982	Uwharrie Communications	2254, 2586
Troy Cablevision	1376	Valley Cable & Satellite	
Trust Cable TV	1376, 1877, 1982	Communications	1376, 1877, 1982
		Valley Cable TV	1376, 1877, 1982
		Valley Telecom	2302, 2482
		Valparaiso Communications	1376
		ValuNet Fiber	3605

STB

Van Horne Cablevision	1376, 1877, 1982	Wellman Cooperative Telephone Association	3605
Vast Broadband	1877, 1376	West Alabama TV Cable	1376, 1877, 1982
Vaughnsville Communications	1998, 2254, 3028, 3426, 3605	West Carolina Telephone	3028
Venture Communications Cooperative	1481, 1998, 2302, 2482, 3028	West Central Telephone	1376, 1877, 1982
Venus Telephone Cooperative	1376, 1898	West Lake Cablevision	1376, 1877, 1982
Veracity Communications	1376, 1877, 1982	West River Cable Television	1376, 1877, 1982
Verizon	2378	West-Tex Telecommunications	1998, 2254, 3028, 3426, 3605
Verneau Networks	1998, 2254, 3028, 3426, 3605	WesTel Systems	1376, 1877, 1982
Vernon Telephone Cooperative	2586	Western Broadband	1376, 1877, 1982
Vianet TV	1898, 3605, 3118	Western Cable Service	1376, 1877, 1982
Vicksburg Video	1376	Western Iowa Networks	1376, 1877, 1982
Vidia Communications	1376, 1877, 1982	Western Iowa Telecom	1376, 1877, 1982
Vidion Cable	1376, 1877, 1982	Western Iowa Telephone	1877
Vidéotron	2947, 1877, 1376	Western Montana CommunityTel	1376, 1982
Village Cable	1376, 1982	Western Telephone Company	1376, 1877, 1982
Viola Communications	1376, 1877, 1982	Western Wisconsin Communications	1376, 2586
Viola Home Telephone	1998, 2254, 3028, 3426, 3605	WestTex Telephone Cooperative	1998, 2254, 3028, 3426, 3605
Vision Communications	1376	Westman Communications	1376, 2187
Vision Systems	1376, 1982	Westpa.net	1376, 1877, 1982
VisionComm	1376, 1877, 1982	Westphalia Broadband	2254, 2586
Vista III Media	1376, 1982	Wetherell Satellite Cable TV	1376, 1877, 1982
Vital Communications	1376, 1877, 1982	WFL Cable Television	1376, 1877, 1982
Viya	1376, 1877, 1982	Wheat State Telephone	3426, 3605, 4437
VMedia	4596	Whidbey Telecom	1998
VNET Fiber	1998, 2254, 3028, 3426, 3605	White County Video	1376
Vogtman Engineering	1376, 1877, 1982	WiaTel	1877
Volcano Vision	1376	WiConnect Wireless	1376, 1877, 1982
Voom	0869	WideOpenWest	1376, 2187
VTel	3028	Wightman	1898, 3426, 4437
VTX Communications	2254, 3426	Wikstrom Systems	1376, 1877, 1982
Vyve Broadband	1376, 1982, 1877, 4079	Wilco Electronic Systems	1376, 1877, 1982
W.D.B. Communications	1376, 1877, 1982	Wilcop Cable	1376, 1877, 1982
Wabash Independent Networks	1376, 1877, 1982	Wilkes Telecommunications	1481, 1998, 2302, 2482, 3028
Wabash Mutual Telephone Company	1615, 1898	Willamette Broadband	1376
Wadsworth Cable TV	1376	Williamstown Cable	1376, 3560
Waitsfield Cable	1376	Windbreak Cable TV	1376, 1877, 1982
Walnut Communications	1376, 1982	Windjammer Cable	1376, 1877
Walnut Grove Cable TV	1376, 1877, 1982	Windstream	1376, 1982, 0775
Ward Communications	1376, 1877, 1982	Winslow Communications	1376, 1877, 1982
Warwick Valley Telephone	1376, 1877, 1982	Wire Tele-View	1376, 1877, 1982
Washington Cable	3560	Wireless One	1376, 1877, 1982
Washington County Rural Telephone Cooperative	1376, 1877, 1982	Wistron NeWeb	3118, 6268
Watch TV	1481, 1998, 2302, 2482, 3028	Wittenberg Telephone	1376, 1877, 1982
Waterville Cable TV	0775, 1376, 1877, 1982	WK&T Telecommunications	2254, 2302
Watson Cable	1376, 1877, 1982	Wood County Telephone	1376, 1877, 1982
Wave Broadband	1376, 1877, 4079, 2479, 3560, 2187	Woodsfield Municipal Cable	1376, 1877, 1982
Wave Wireless	1376, 1877, 1982	World Satellite Cable Systems	0775
Waverly Communications Utility	3426	Worth Cable TV	1376, 1877, 1982
WC Tel	3028	WOW!	1877, 1376, 2187, 2479, 3560, 2826, 3294
WCTA	1376, 1877, 1982	WT Services	1376, 1877, 1982
Webster-Calhoun Cooperative Telephone Association	2254	WTC Communications	1376, 1877, 1982, 1998
WEHCO Video	1376	WTCI Cable	1376, 1877, 1982
Weiss Lake Cable	1376, 1877	Wyandotte Municipal	1376, 1982
		Xfinity	1982, 1376, 1877, 3560, 2187, 4079, 4443, 4537
		XIT Communications	2302
		Xittel Telecommunications	3605

STB | AUDIO SOUNDBAR

Xtream	1376, 3560, 1982, 1877
Yadkin Valley Telecom	2345
Yadtel Telecom	4437
Ycom Networks	1376, 1877, 1982
Yelcot Video Group	1376, 1877, 1982
Yelo	1376
Ygnition	1376, 1877, 1982
Yondoo	3426
Youngsville TV	1376, 1877, 1982
Yucca Telecom	1998, 2254, 3028, 3426, 3605
Zampelli Electronics	1376, 1877, 1982
Zazeen	3426, 3118
Zenith	3469
Zito Media	1376, 1877, 1982
Zoom Media	1376, 1877, 1982

AUDIO SOUNDBAR

Acoustic Audio	4683
Aiwa	0158
Altec Lansing	4609
AMC	1077
Apex Digital	4334
Arcam	2241
AudioSource	3721
Aura	4293
Axess	4095
Axiim	4951
Bestisan	5271
Bose	1933, 1629, 3959, 4307, 3708, 4024, 3706, 3832
Boston Acoustics	3698
BÖHM	4280
Coby	3654
Craig	4466
Curtis	3942
Definitive Technology	4415, 3645, 4984
Denon	2857, 3347, 2516, 3380, 2502, 4025
Dynavox	3231
Dynex	2971, 3951
Emotiva	3763
Enclave Audio	4800
Epworth	0158
Focal	4021
Gateway	1567
GE	3297
General Electric	3297
Haier	3516
Harman/Kardon	2241, 0110, 1304, 2443, 3418, 4186, 3756, 3320, 3517, 3391
iLive	3175
Inkel	3770, 4090, 3793
Insignia	3951, 2472, 2169, 2966, 3770, 4424, 1077
Integra	1805, 3860, 2730, 4023, 4014, 2503, 3992
JBL	3756, 2241, 3391, 3535, 5132, 0110
JVC	1676, 2040, 2331, 3049
Kenwood	1570, 1293
Klipsch	4941, 4198, 4200

LG	2676, 2197, 3509, 3217, 3996, 4043, 1293
Logitech	1408
Magnavox	1831, 1269, 3282
Marantz	1289, 2114, 3772, 3347, 1269
Martin Logan	3526
McIntosh	1289
Megacra	5271
Monoprice	4505
Monster Cable	4987
Onkyo	1805, 2730, 3860, 4023, 2503, 4041, 4014, 3984, 3992, 5094
Onn	5042, 5041
Optimus	1023
Panasonic	2967, 3309, 3323, 3055, 2452, 3767, 1676
Paradigm	4536, 3526, 4846
Philco	1831
Philips	1269, 1831, 2459, 4105, 3379, 2311, 3776, 3652, 3801, 3282, 2675, 4012
Pinnacle Speakers	3774, 3728
Pioneer	1935, 3057, 2432, 1023, 3956
Polk Audio	1289, 4431
Proficient	3661
Pyle	4333
RCA	2041, 2611, 3297, 2719, 2655, 3969, 1023, 2544
Samsung	2660, 1868, 2809, 3320, 3382, 3154, 2137, 1304
Samsung Harman/Kardon	3320
Sanyo	4176, 3282
Sharp	3736, 3097, 3929
Sherbourn	3763
Sherwood	1077, 1567, 3136, 3120, 2169, 3793, 4090, 3770
Sherwood Newcastle	1567, 2169
Sonos	3919
Sony	0158, 1622, 1759, 2172, 2475, 1822, 2522, 1758, 3700, 4315, 3257, 2582, 3487, 4366, 2610, 4457, 4285
SpeakerCraft	3661
Sungpo	3736, 3097, 3929
TaoTronics	4672
TCL	4672
Toshiba	3627
VIZIO	2454, 3935, 5095, 4911
Wards	0158
Yamaha	0176, 3580, 2467, 3030, 2116, 2458, 3325, 3917, 4269, 2021
Zenith	1293, 2197
ZVOX	2332, 3913, 2334

WARRANTY / GUARANTEE

WARRANTY / GUARANTEE INFORMATION

Terms and Conditions for "100% Guaranteed To Work" policy, and the separate 1 Year Limited Warranty against defects in material and workmanship can be found at www.oneforall.com/remotegarantee, or you may request hard copies via mail to Universal Electronics Inc. 15147 N. Scottsdale Road, Suite H300, Scottsdale, Arizona 85254. Please include your full name, product information, and contact information in your request communication.

www.oneforall.com

INFORMATIONS SUR LA GARANTIE

GARANTIE / INFORMATIONS SUR LA GARANTIE

Les conditions et modalités relatives aux règles " Fonctionnement garanti à 100%" et la garantie limitée de 1 an contre tout défaut de matériaux et de main-d'œuvre peuvent être consultés sur www.oneforall.com/remotegarantee, ou vous pouvez demander une copie papier en composant, ou par courrier électronique au service d'assistance technique Universal Electronics Inc. 15147 N. Scottsdale Road, Suite H300, Scottsdale, Arizona 85254. Veuillez inclure votre nom complet, les informations sur votre produit et vos coordonnées dans votre demande de communication.

www.oneforall.com



Connect with us on Facebook.
Rejoignez-nous sur Facebook.
facebook.com/oneforallworldwide



Connect with us on LinkedIn.
Rejoignez-nous sur LinkedIn.
linkedin.com/company/one-for-all-worldwide



Connect with us on Instagram.
Rejoignez-nous sur Instagram.
[@oneforall.worldwide](https://www.instagram.com/oneforall.worldwide)



Visit our YouTube channel.
Visitez notre chaîne youtube.
youtube.com/user/oneforallproducts

Customer Support:
Service client:
www.oneforall-canada.ca

OFA warranty / terms & conditions:
Garantie OFA / termes et conditions:
www.oneforall-canada.ca

Imported into Canada by:
Importé au Canada par:
**Universal Electronics BV –
Europe & International
P.O. Box 3332, 7500 DH Enschede
The Netherlands
www.oneforall.com**

One For All is a registered trademark
of Universal Electronics BV
One For All est une marque déposée
de Universal Electronics BV

**Industry Canada Regulatory Information
CAN ICES-3 (B)/NMB-3 (B)
Avis d'Industrie Canada CAN ICES-3 (B)/NMB-3 (B)**

713796
RDN1181124